
2. EXPLODED VIEWS AND PARTS LIST

NOTES:
- *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Screws adjacent to ▼ mark on product are used for disassembly.*
- *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)*

2.1 PACKING SECTION

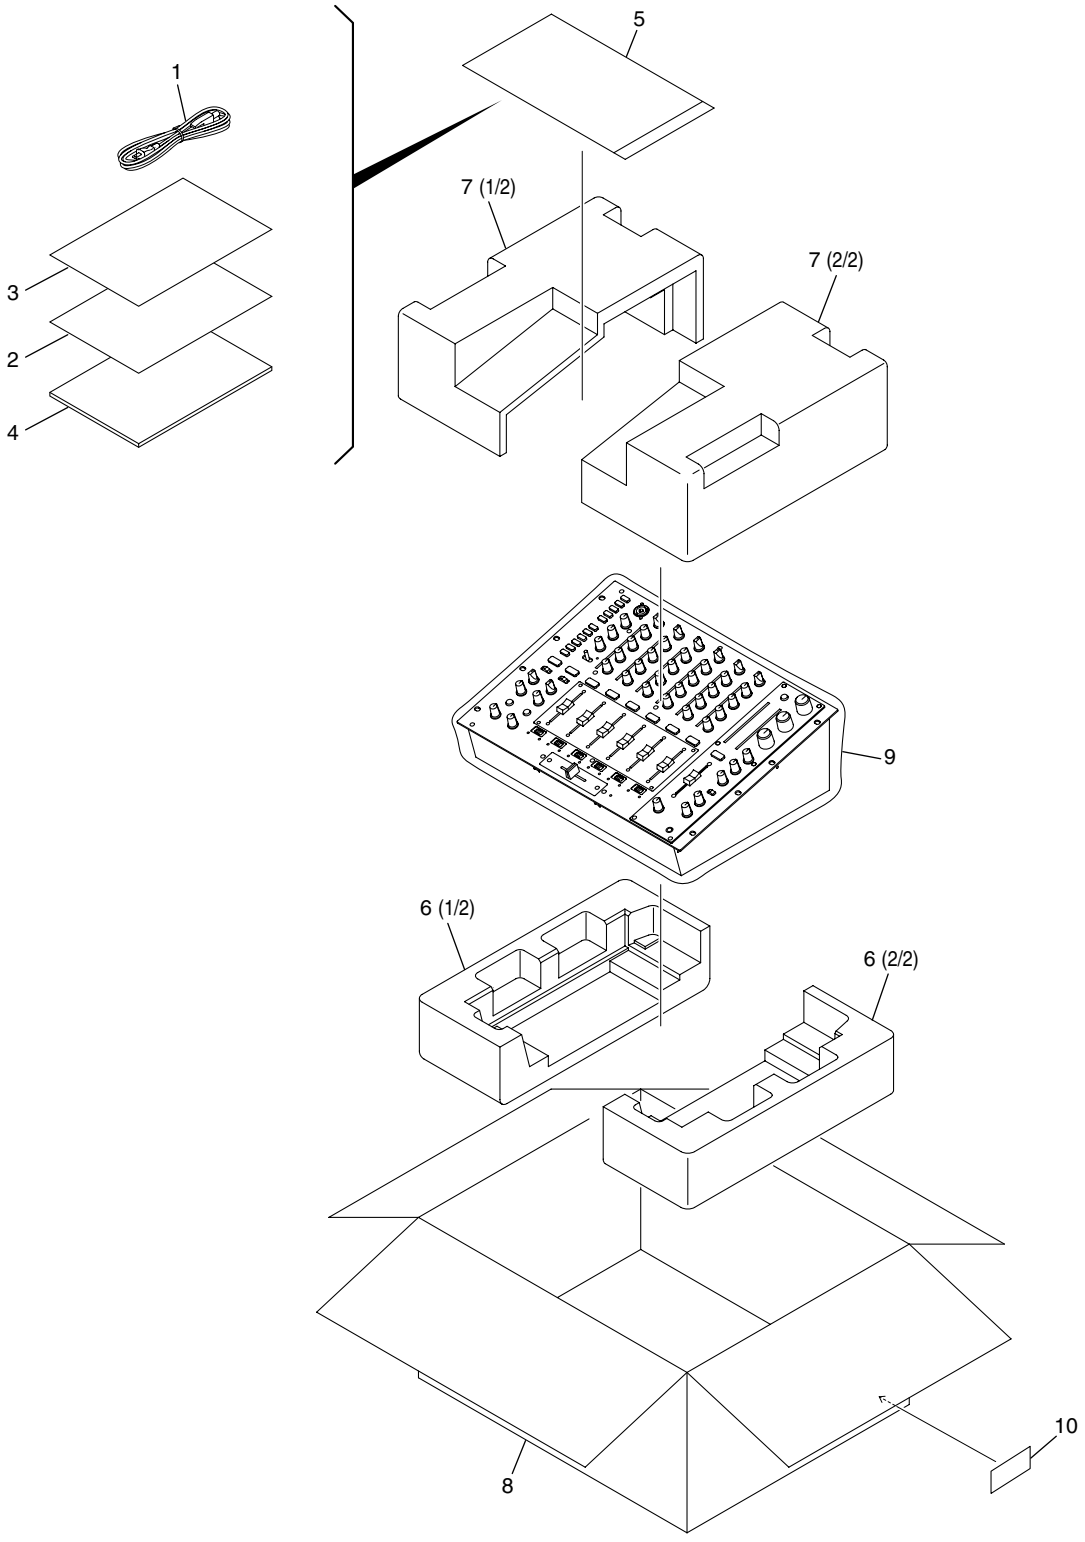

(1) PACKING SECTION PARTS LIST


Mark	No.	Description	Part No.
⚠	1	Power Cord	See Contrast table (2)
NSP	2	Warranty	See Contrast table (2)
NSP	3	User Seat	DRM1262
	4	Operating Instructions	See Contrast table (2)
NSP	5	Polyethylene Bag (0.06 x 230 x 340)	AHG7117
	6	Bottom Pad	DHA1641
	7	Top Pad	DHA1642
	8	Packing Case	See Contrast table (2)
	9	Packing Sheet	RHC1023
NSP	10	Label	VRW1629

(2) CONTRAST TABLE

DJM-1000/KUCXJ, WYXJ and RLTXJ are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-1000 /KUCXJ	DJM-1000 /WYXJ	DJM-1000 /RLTXJ
⚠	1	Power Cord	DDG1028	ADG7062	ADG7062
NSP	2	Warranty	ARY7043	Not used	Not used
	4	Operating Instructins (English)	DRB1371	Not used	Not used
	4	Operating Instructins (English/ French/ German/ Italian/ Duch/ Spanish)	Not used	DRB1372	Not used
	4	Operating Instructins (English/ Spanish/ Chinese)	Not used	Not used	DRB1373
	8	Packing Case	DHG2501	DHG2502	DHG2503

2.2 BOTTOM SECTION

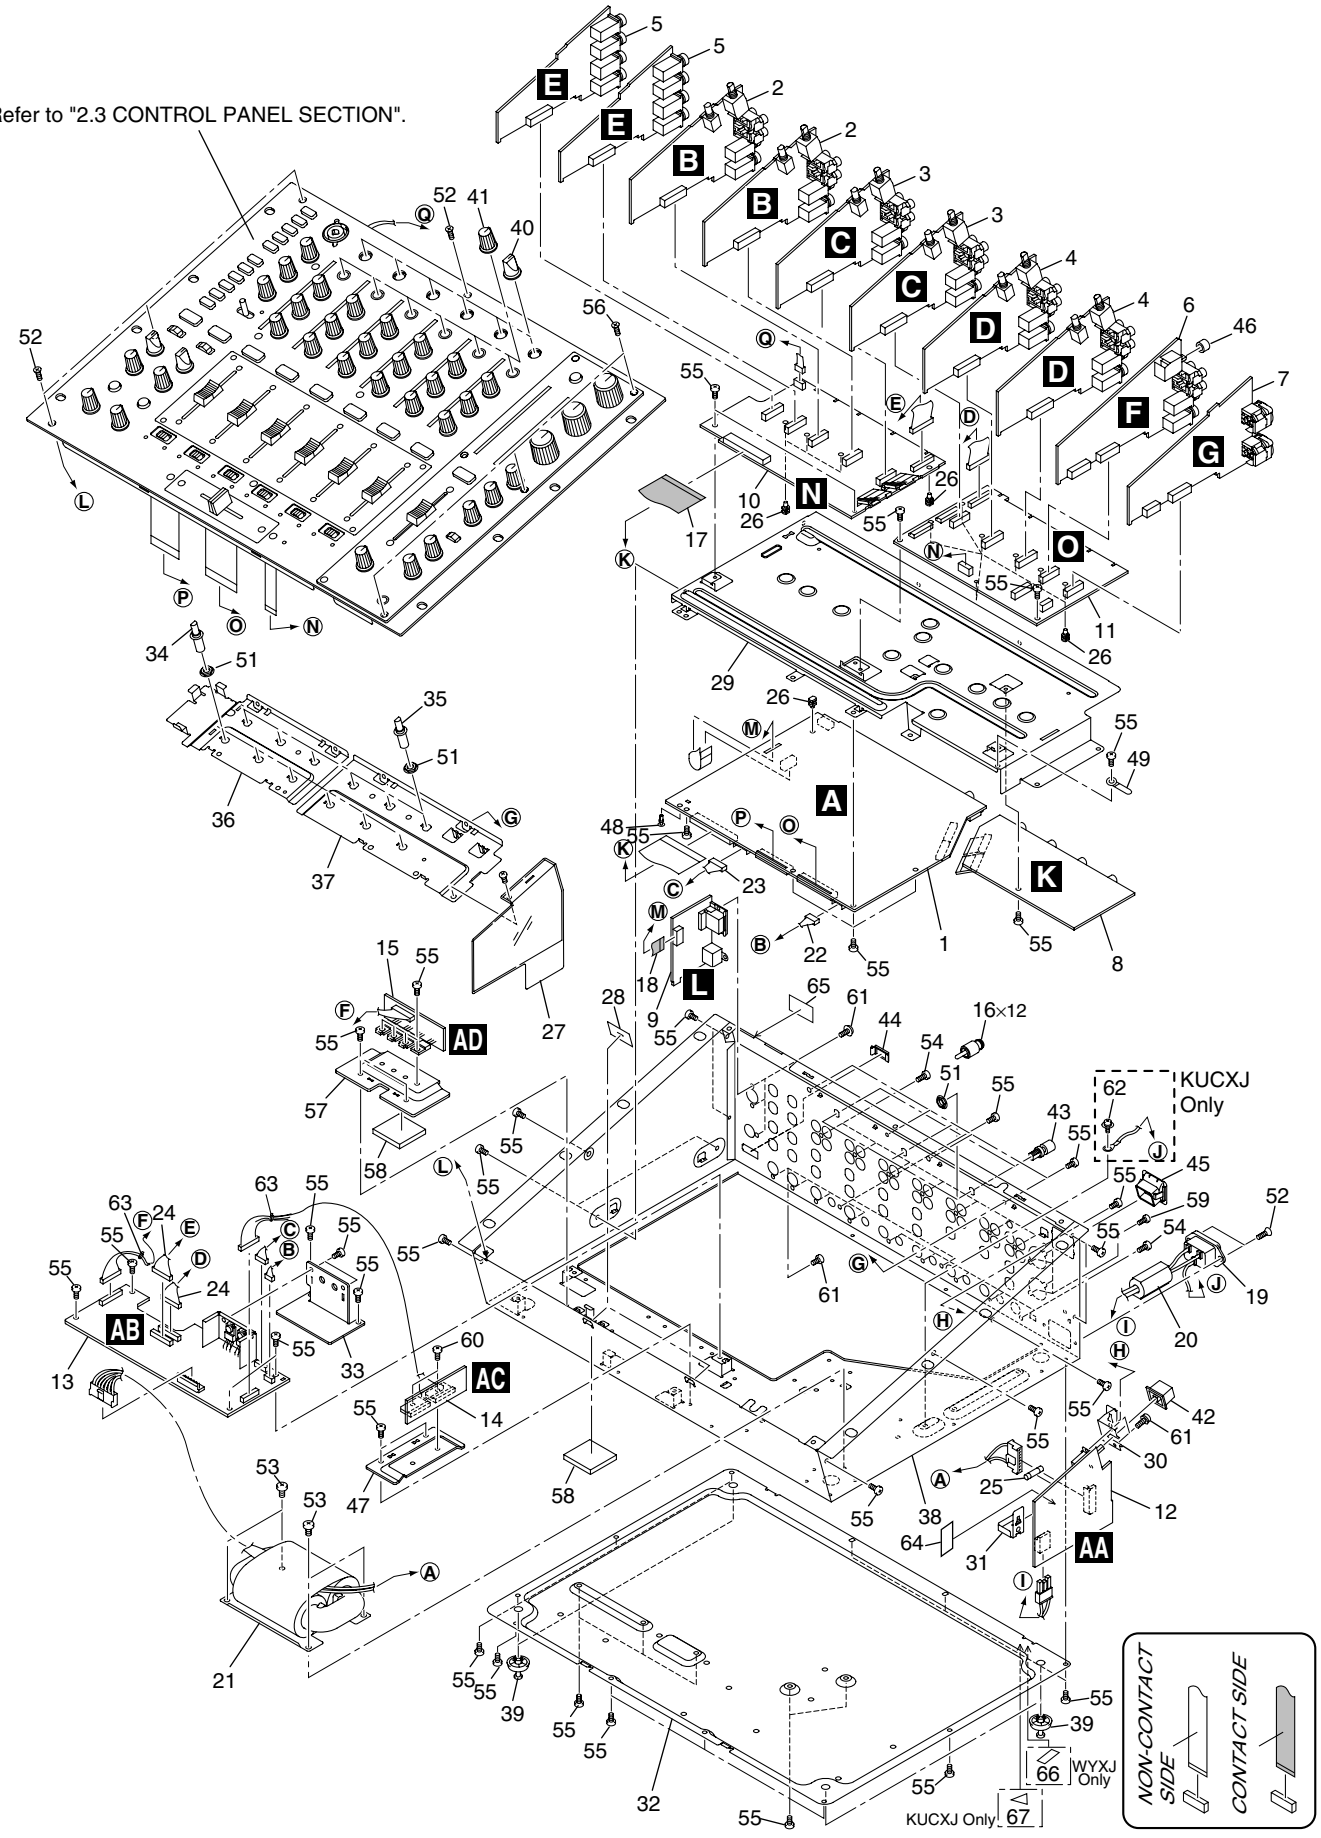

(1) BOTTOM SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	DIGITAL MAIN Assy	DWG1586
	2	CH1/CH2 INPUT Assy	DWX2501
	3	CH3/CH4 INPUT Assy	DWX2502
	4	CH5/CH6 INPUT Assy	DWX2503
	5	SEND/RETURN Assy	DWX2408
	6	BOOTH/REC Assy	DWX2409
	7	MASTER Assy	DWX2410
	8	DIGITAL SUB Assy	DWX2414
	9	VISUAL LINK Assy	DWX2413
	10	BUS1 Assy	DWX2422
	11	BUS2 Assy	DWX2423
	12	ACIN Assy	See Contrast table (2)
	13	POWER Assy	DWR1384
	14	REG1 Assy	DWR1385
	15	REG2 Assy	DWR1386
	16	Short Pin Plug	AKM7008
	17	40P Flexible Cable	DDD1288
	18	10P Flexible Cable	DDD1289
⚠	19	AC Inlet Assy	See Contrast table (2)
⚠	20	Ferrite Core	DTH1195
⚠	21	Power Transformer	See Contrast table (2)
	22	Connector	PF04EE-S07
	23	Connector	PF06EE-S15
	24	Connector	PF10EE-S30
⚠	25	Fuse (FU1)	See Contrast table (2)
	26	Card Spacer	AEC7214
	27	Shield Plate (A)	DEC2839
	28	Shade Sheet A	DEC2842
	29	PCB Stay (H)	DNF1704
	30	Power Switch Stay	DNF1705
	31	Power PCB Stay	DNF1716
	32	Bottom Plate	DNH2620
NSP	33	Heatsink Plate B	DNH2644
	34	Extension Shaft (L)	DNK4336
	35	Extension Shaft (L2)	DNK4491
	36	PCB Stay V (A) Assy	DXB1856
	37	PCB Stay V (B) Assy	DXB1857
NSP	38	Chassis	See Contrast table (2)
	39	Leg Assy	REC-434
	40	Rotary SW Knob	DAA1167
	41	Rotary Knob B	DAA1171
	42	Power Knob	DAC2133
	43	Earth Terminal with Knob	DKE1014
	44	Blind Cap	DNK4218
	45	Power Knob Guard	DNK4335
	46	Select Knob (S)	DAA1166
	47	Heatsink A	DNG1092
	48	Nyron Rivet (3 x 4.5)	RBM-003
NSP	49	Cord Clamper	ZCB-069Z
	50	Flange Nut M12	DBN1012
	51	Flange Nut M7	DBN1011
	52	Screw	CMZ30P100FTB
	53	Screw	BBZ40P060FTC
	54	Screw	BPZ30P080FTB
	55	Screw	BBZ30P060FTB
	56	Screw	CMZ30P100FNI
	57	Heatsink B	DNG1093
NSP	58	Silicone Sheet C	DEB1764
	59	Screw	BBZ26P060FTB
	60	Screw	BBZ30P080FTC
	61	Screw	PMH30P100FTB
	62	Screw	See Contrast table (2)
NSP	63	Binder	ZCA-BK1
NSP	64	Fuse Card	DAX1015
NSP	65	Label	VRW1629
	66	Label (WEEE)	See Contrast table (2)
	67	Label	See Contrast table (2)

(2) CONTRAST TABLE

DJM-1000/KUCXJ, WYXJ and RLTXJ are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-1000 /KUCXJ	DJM-1000 /WYXJ	DJM-1000 /RLTXJ
	12	ACIN Assy	DWR1383	DWR1383	DWR1399
⚠	19	AC Inlet Assy (3P)	DKP3730	Not used	Not used
⚠	19	AC Inlet Assy (2P)	Not used	DKP3731	DKP3731
⚠	21	Power Transformer	DTT1179	DTT1178	DTT1180
⚠	25	Fuse (FU1 : 2A)	REK1111	Not used	Not used
⚠	25	Fuse (FU1 : 1.6A)	Not used	REK1024	REK1024
NSP	38	Chassis	DNA1304	DNA1306	DNA1326
	62	Screw	PMH40P080FTC	Not used	Not used
	66	Label (WEEE)	Not used	ARW7322	Not used
	66	Label	DRW1975	Not used	Not used

2.3 CONTROL PANEL SECTION

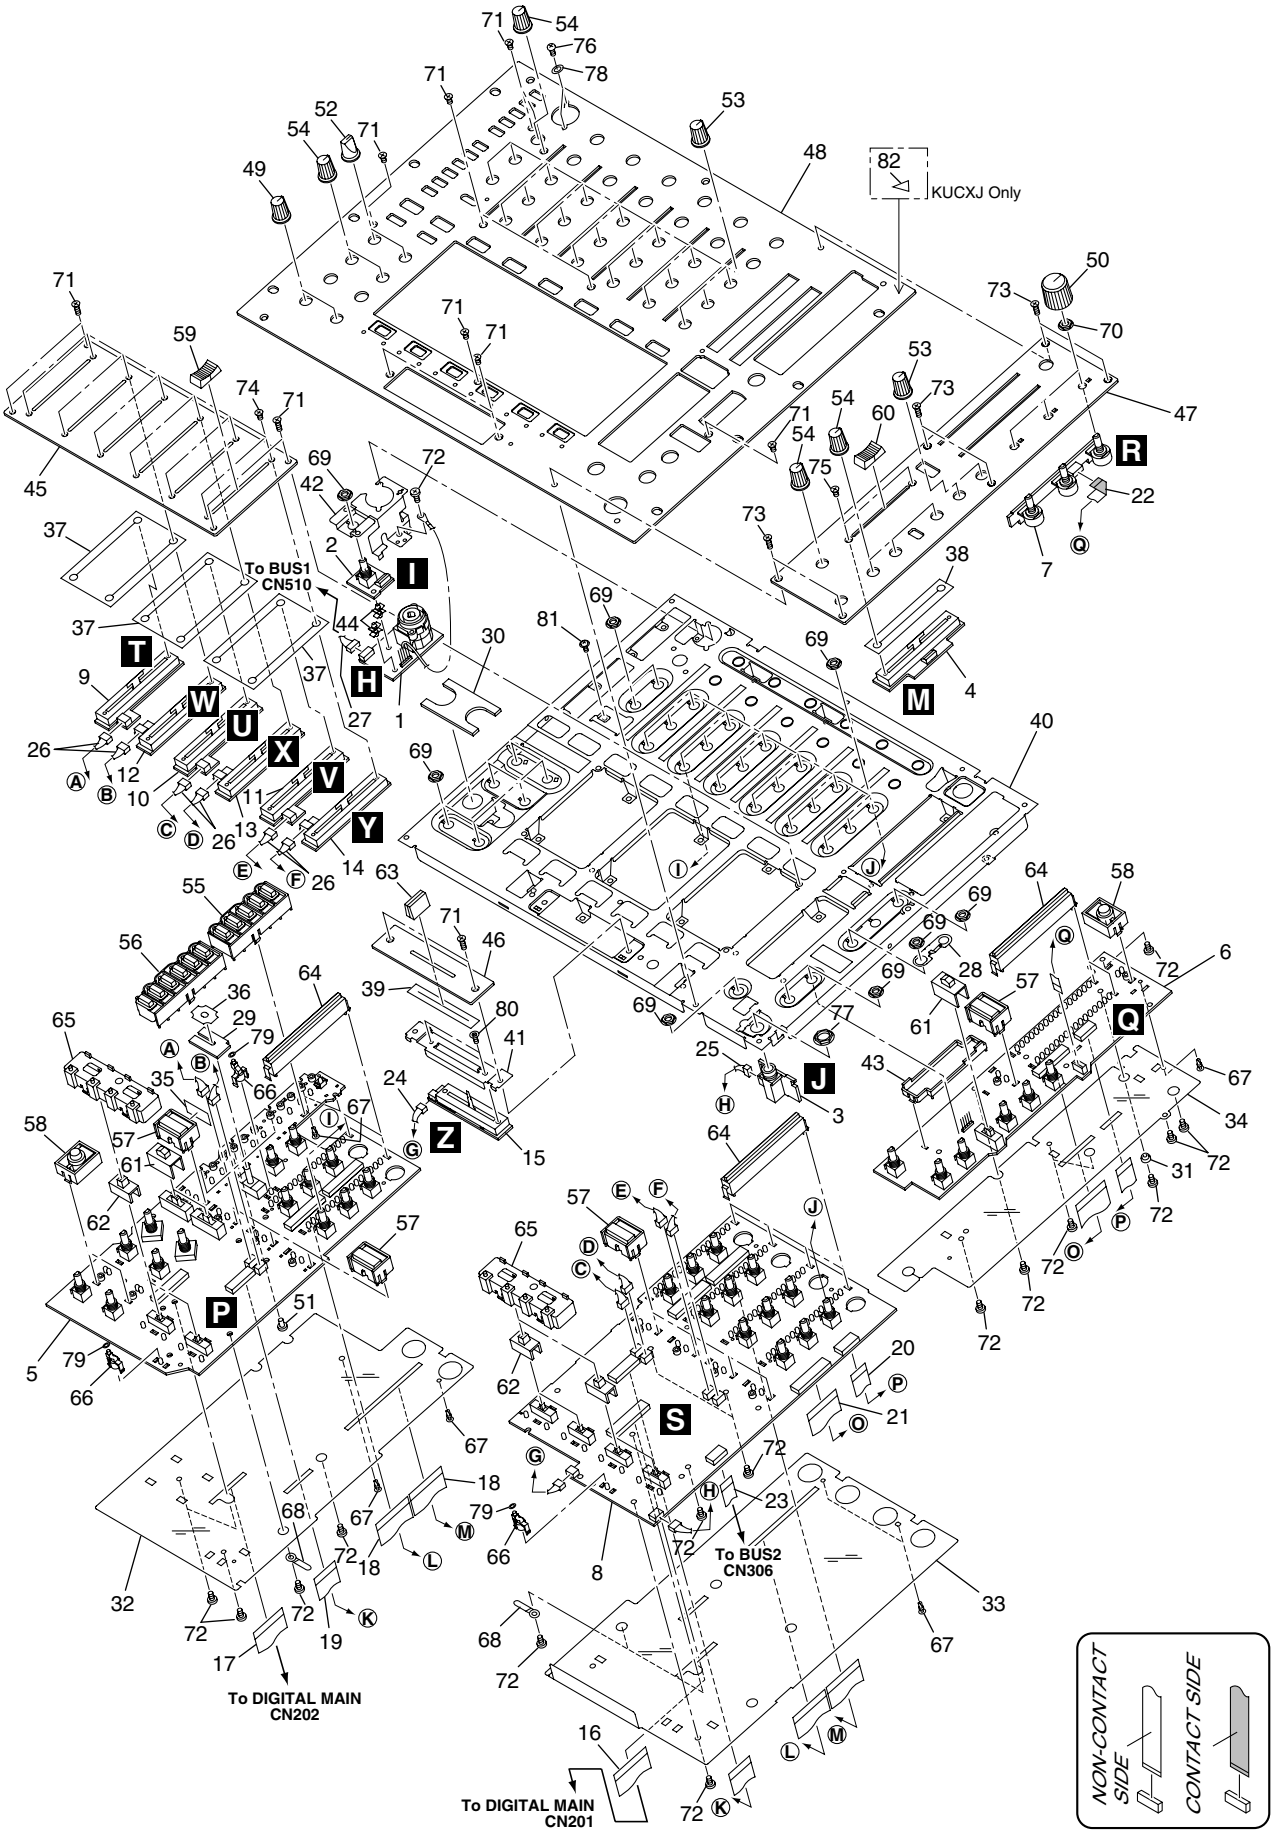

CONTROL PANEL SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	MIC Assy	DWX2411
	2	MIC VR Assy	DWX2466
	3	HP Assy	DWX2412
	4	MASTER FADER Assy	DWX2421
	5	PANEL1 Assy	DWX2427
	6	PANEL2 Assy	DWX2428
	7	ISOLATOR Assy	DWX2425
	8	PANEL3 Assy	DWX2426
	9	CH1/CH3/CH5 FADER Assy	DWX2416
	10	CH1/CH3/CH5 FADER Assy	DWX2418
	11	CH1/CH3/CH5 FADER Assy	DWX2443
	12	CH2/CH4/CH6 FADER Assy	DWX2415
	13	CH2/CH4/CH6 FADER Assy	DWX2417
	14	CH2/CH4/CH6 FADER Assy	DWX2442
	15	CROSS FADER Assy	DWX2424
	16	31P Flexible Cable	DDD1280
	17	28P Flexible Cable	DDD1281
	18	31P Flexible Cable	DDD1282
	19	20P Flexible Cable	DDD1283
	20	13P Flexible Cable	DDD1284
	21	28P Flexible Cable	DDD1285
	22	7P Flexible Cable	DDD1286
	23	10P Flexible Cable	DDD1287
	24	Connector	PF03PP-R10
	25	Connector	PF04PP-R07
	26	Connector	PF04PP-R10
	27	Connector	PF05PP-R10
	28	Earth Spring	DBK1265
	29	Shade Spacer A	DEB1729
	30	Shade Spacer B	DEB1730
	31	POM Bush (M3)	DEC2397
	32	Insulation Sheet (A)	DEC2762
	33	Insulation Sheet (B)	DEC2763
	34	Insulation Sheet (C)	DEC2764
	35	Shade Sheet B	DEC2843
	36	SW Packing	DEC2848
	37	CH Fader Packing	DEC2865
	38	Master Fader Packing	DEC2866
	39	Fader Packing	DEC2867
NSP	40	Panel Stay	DND1253
	41	CRF Stay	DNF1706
	42	MIC. Stay	DNF1720
	43	Master Fader Holder	DNK4374
NSP	44	PC Support	VEC1508
	45	CHF Panel	DAH2414
	46	CRF Panel	DAH2415
	47	Master Panel	DNB1135
	48	Control Panel	DNB1136
	49	Rotary Knob (SS)	DAA1164
	50	VR Knob (ISO)	DAA1165
	51	Nyron Rivet	DEC2870
	52	Rotary SW Knob	DAA1167
	53	Rotary Knob A	DAA1170
	54	Rotary Knob B	DAA1171
	55	Set Knob (LINK)	DAC2213
	56	Set Knob (FS)	DAC2214
	57	CUE Knob	DAC2215
	58	ISO Knob	DAC2216
	59	CHF Knob	DAC2217
	60	MF Knob	DAC2218
	61	Slide SW Cap (A)	DAC2219
	62	Slide SW Cap (B)	DAC2220
	63	Slider Knob (L)	DNK4210
	64	Level Meter Lens	DNK4332
	65	Set Lens	DNK4333
	66	LED Lens	DNK4334
	67	Nyron Rivet (3 x 4.5)	RBM-003
NSP	68	Cord Clamper	ZCB-069Z
	69	Flange Nut M9	DBN1008
	70	Flange Nut M7	DBN1011
	71	Screw	CMZ30P100FTB
	72	Screw	BBZ30P060FTB
	73	Screw	CMZ30P100FNI
	74	Screw	CMZ30P050FTB
	75	Screw	CMZ30P050FNI
	76	Screw	BPZ30P120FTB
	77	Flange Nut M12	DBN1012
	78	PC Washer	DEC2868
	79	Poly. Slider Washer	WA26D080D025
	80	Screw	DBA1262
	81	Screw	AMZ26P040FTC
	82	Label	See Contrast table (2)

(2) CONTRAST TABLE

DJM-1000/KUCXJ, WYXJ and RLTXJ are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-1000 /KUCXJ	DJM-1000 /WYXJ	DJM-1000 /RLTXJ
	82	Label	DRW1975	Not used	Not used