9. EXPLODED VIEWS AND PARTS LIST

NOTES:
- *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Screws adjacent to ▼ mark on product are used for disassembly.*
- *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)*

9.1 PACKING SECTION

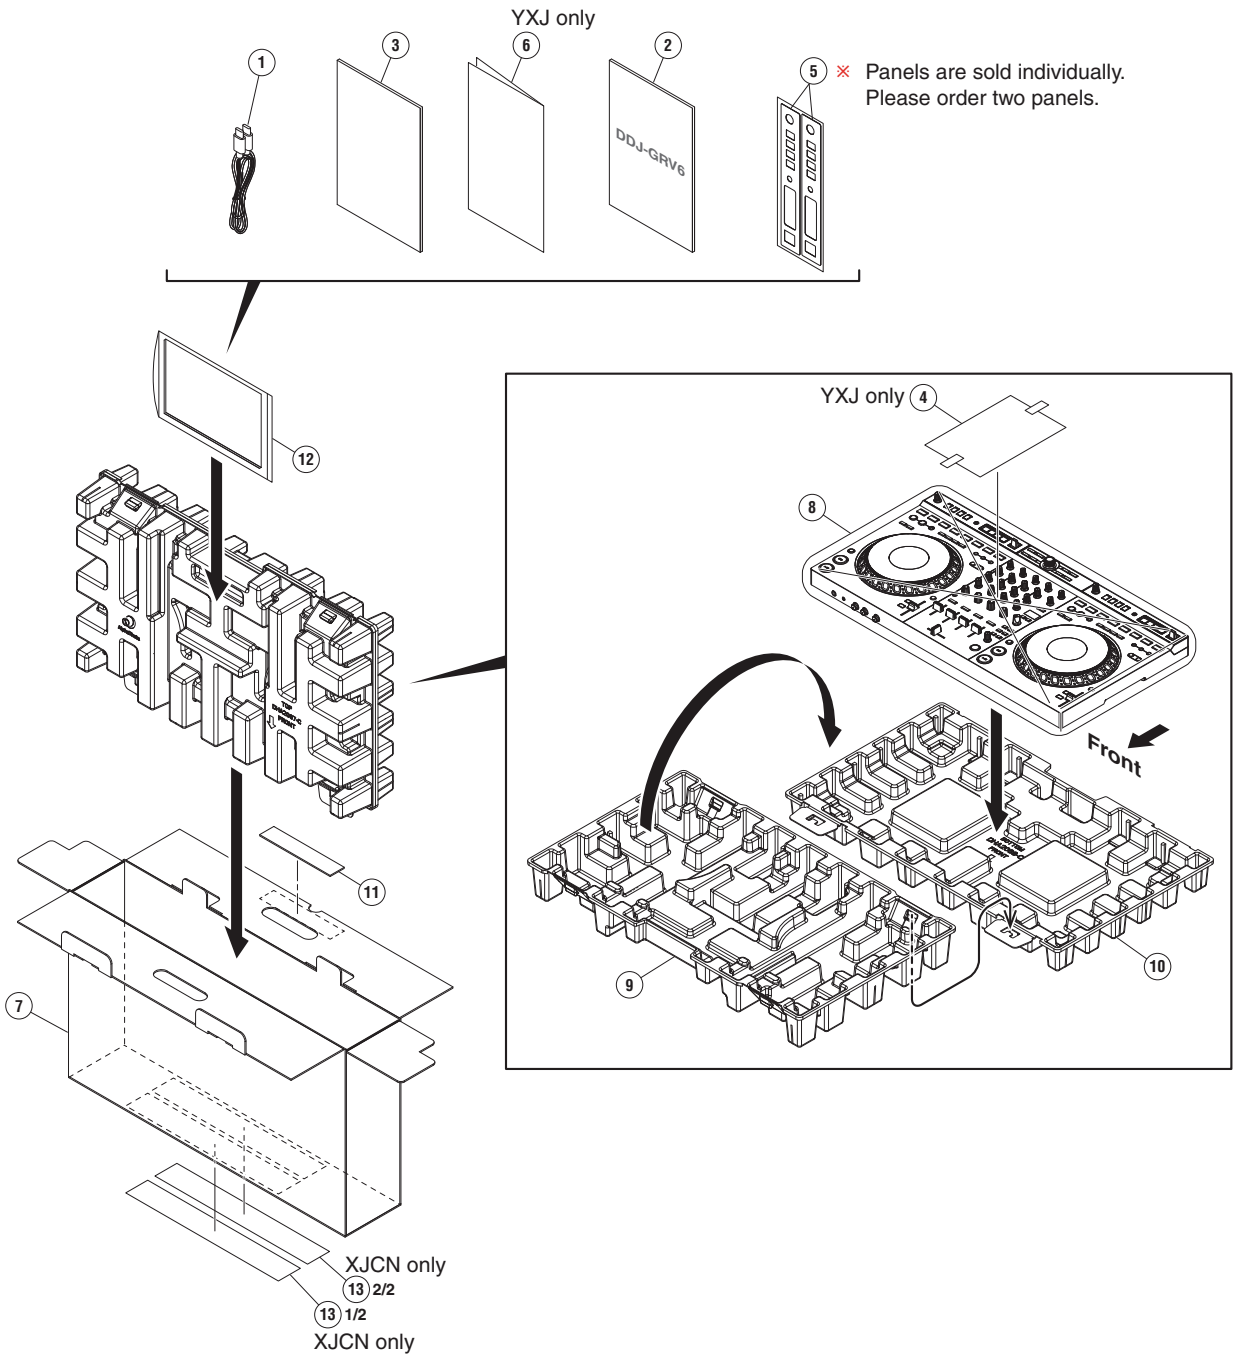

(1) PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	USB cable	DDE1158
	2	Quick Start Guide	See Contrast table (2)
	3	Precautions for Use	See Contrast table (2)
	4	Leaflet	See Contrast table (2)
	5	Overlay sheet	DAH3463
NSP	6	Warranty	See Contrast table (2)
	7	Packing Case	DHG3948
	8	Mirror Mat (1200*1000)	DHL1169
	9	Packing Pad	DHA2067
	10	Packing Pad	DHA2068
	11	Plate	DHC1122
NSP	12	Poly Bag	DHL1207
	13	Label	See Contrast table (2)

(2) CONTRAST TABLE

DDJ-GRV6/YXJ and XJCN are constructed the same except for the following:

Mark	No.	Symbol and Description	DDJ-GRV6/YXJ	DDJ-GRV6/XJCN
	2	Quick Start Guide	DRH1806	DRH1817
	3	Precautions for Use	DRH1807	DRH1818
	4	Leaflet	DRH1797	Not used
NSP	6	Warranty	DRY1280	Not used
	13	Label	Not used	DRW3108

9.2 EXTERIOR and CHASSIS SECTION

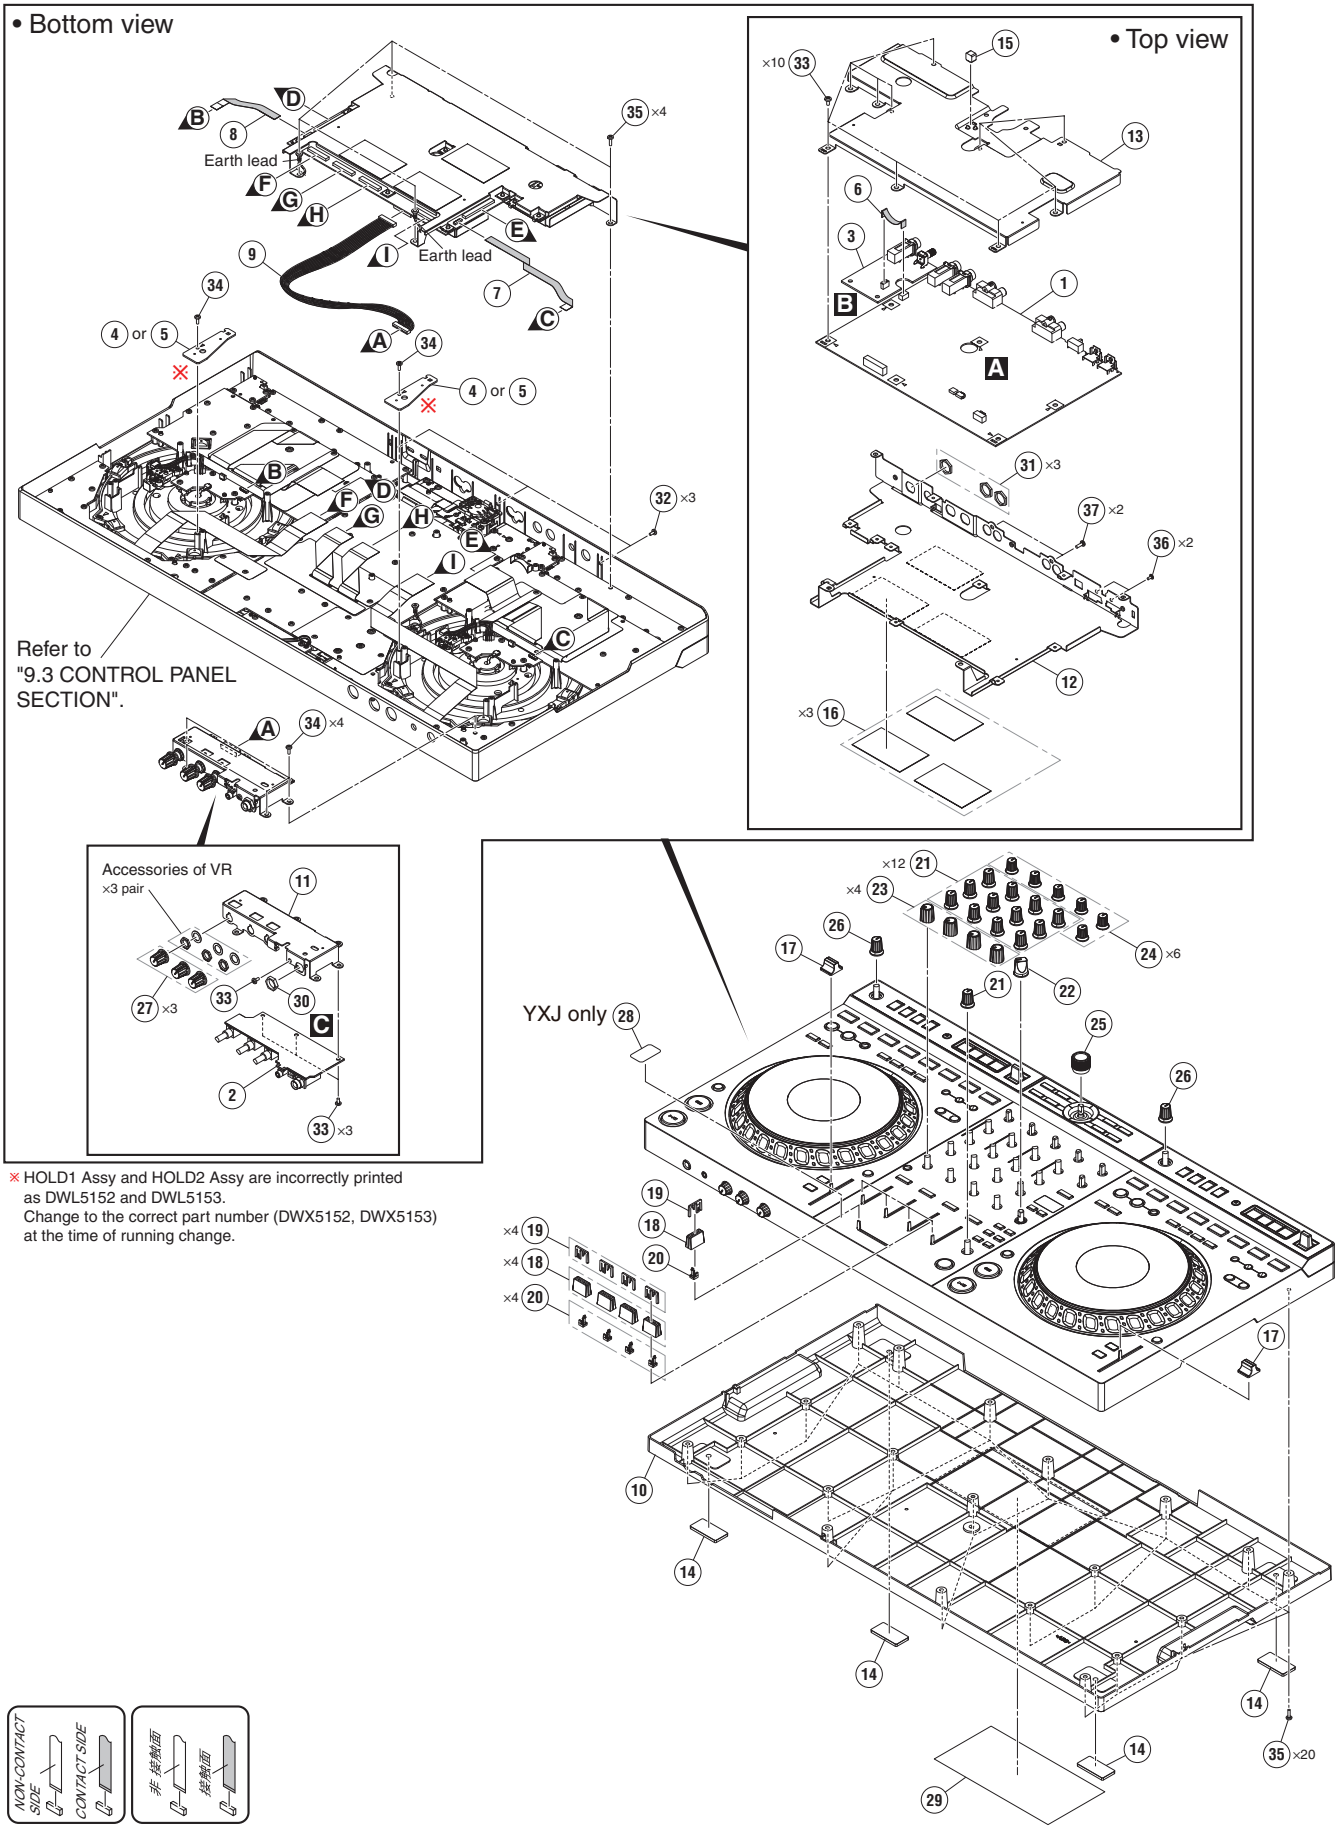

※ HOLD1 Assy and HOLD2 Assy are incorrectly printed as DWL5152 and DWL5153.
Change to the correct part number (DWX5152, DWX5153) at the time of running change.

(1) EXTERIOR and CHASSIS SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	MAIN Assy	DWX5062
	2	HPJK Assy	DWX5070
	3	MIC Assy	DWX5080
	4	HOLD1 Assy	DWX5152
	5	HOLD2 Assy	DWX5153
	6	FFC	DDD2221
	7	FFC	DDD2223
	8	FFC	DDD2227
	9	Parallel Jumper	PF11HH-B32A
⚠	10	Chassis	DNK7217
	11	Stay	DNH3636
	12	Stay	DNH3637
	13	Stay	DNH3638
	14	Sheet/Leg	DEC3534
	15	Gasket	DEC4129
	16	Sheet	DEC4211
	17	Knob	DNK6769
	18	Knob	DAC3539
	19	Slider Knob 2	DAC2685
	20	Stopper/SLD	DNK6009
	21	Knob	DAA1492
	22	Knob	DAA1493
	23	Knob	DAA1494
	24	Knob	DAA1495
	25	Knob	DAA1497
	26	Knob	DAA1496
	27	Knob	DAA1432
NSP	28	Label	See Contrast table (2)
NSP	29	Name Label	See Contrast table (2)
	30	Nut	DBN1028
	31	Nut	NKX2FTC
	32	Screw	BBZ30P060FTB
	33	Screw	BBZ30P060FTC
	34	Screw	BPZ30P080FTC
	35	Screw	BPZ30P100FTB
	36	Screw(M3*5)	DBA1340
	37	Screw	PPZ30P080FTB

(2) CONTRAST TABLE

DDJ-GRV6/YXJ and XJCN are constructed the same except for the following:

Mark	No.	Symbol and Description	DDJ-GRV6/YXJ	DDJ-GRV6/XJCN
NSP	28	Label	DRW3080	Not used
NSP	29	Name Label	DAL1407	DAL1409

9.3 CONTROL PANEL (1/2) SECTION

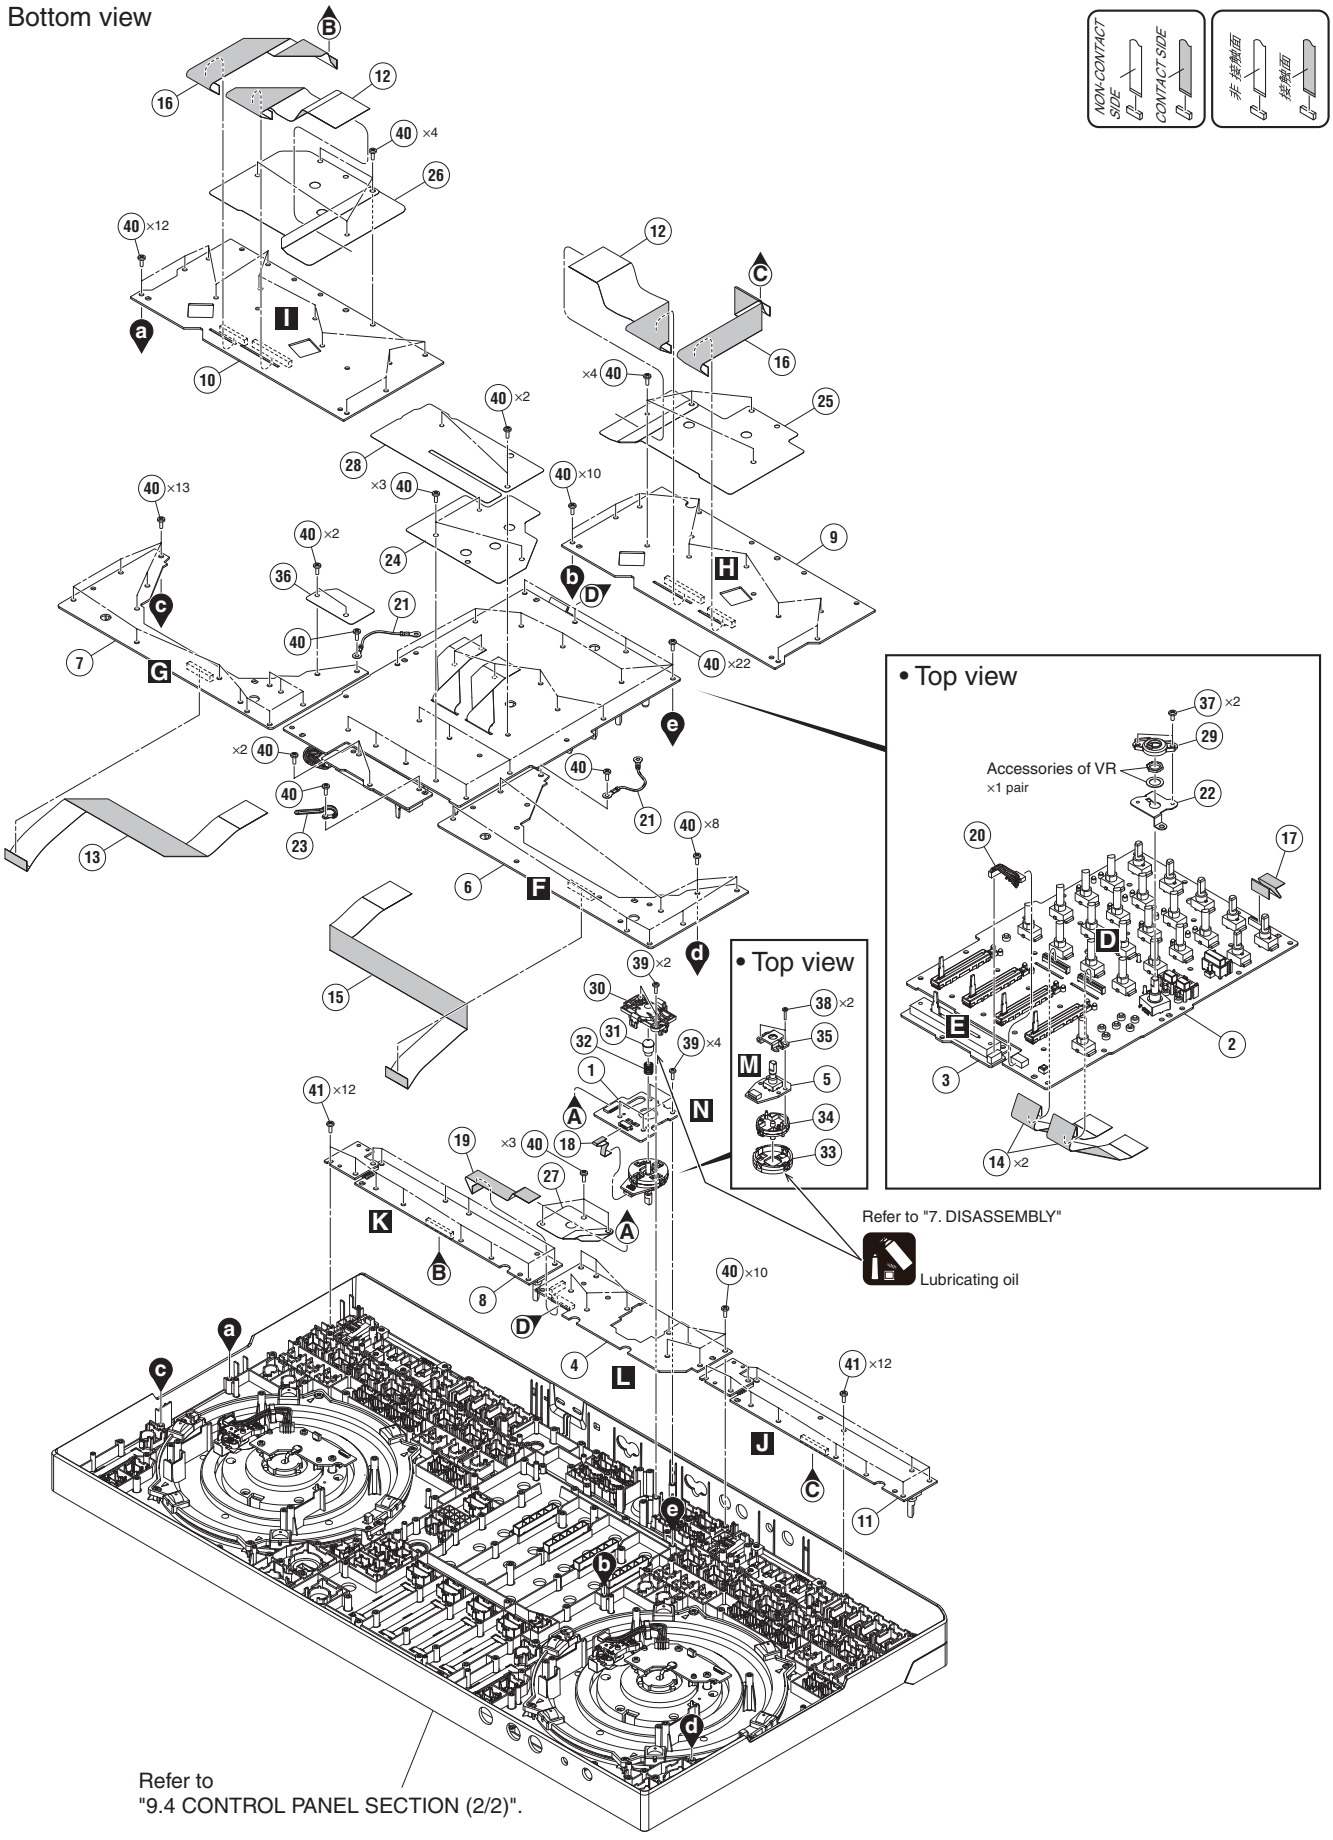

CONTROL PANEL (1/2) SECTION PARTS LIST

Mark No.	Description	Part No.
1	JTACT Assy	DWX5097
2	MIXER Assy	DWX5063
3	CRFD Assy	DWX5072
4	LOAD Assy	DWX5071
5	JKNOB Assy	DWX5096
6	PLAY1 Assy	DWX5077
7	PLAY2 Assy	DWX5078
8	GRV2 Assy	DWX5074
9	DECKL Assy	DWX5068
10	DECKR Assy	DWX5073
11	GRV1 Assy	DWX5069
12	FFC	DDD2222
13	FFC	DDD2224
14	FFC	DDD2225
15	FFC	DDD2226
16	FFC	DDD2228
17	FFC	DDD2229
18	FFC	DDD2230
19	FFC	DDD2231
20	Parallel Jumper	PF05HH-B05A
21	Earth Lead Unit	DE005VC0
22	Stay	DNH3635
23	Cord Clamper	DEX1025
24	Sheet	DEC4166
25	Sheet	DEC4167
26	Sheet	DEC4168
27	Sheet	DEC4169
28	Sheet	DEC4186
29	Holder	DNK7222
30	Cover	DNK7221
31	Stopper	DNK7141
32	Coil Spring	DBH1846
33	Base	DNK7140
34	Base	DNK7139
35	Holder	DNK7225
36	Sheet	DEC4205
37	Screw	BBZ30P060FTC
38	Screw	BPZ20P100FTC
39	Screw	BPZ26P080FTC
40	Screw	BPZ30P080FTC
41	Screw	BPZ30P100FTB

9.4 CONTROL PANEL (2/2) SECTION

• Bottom view

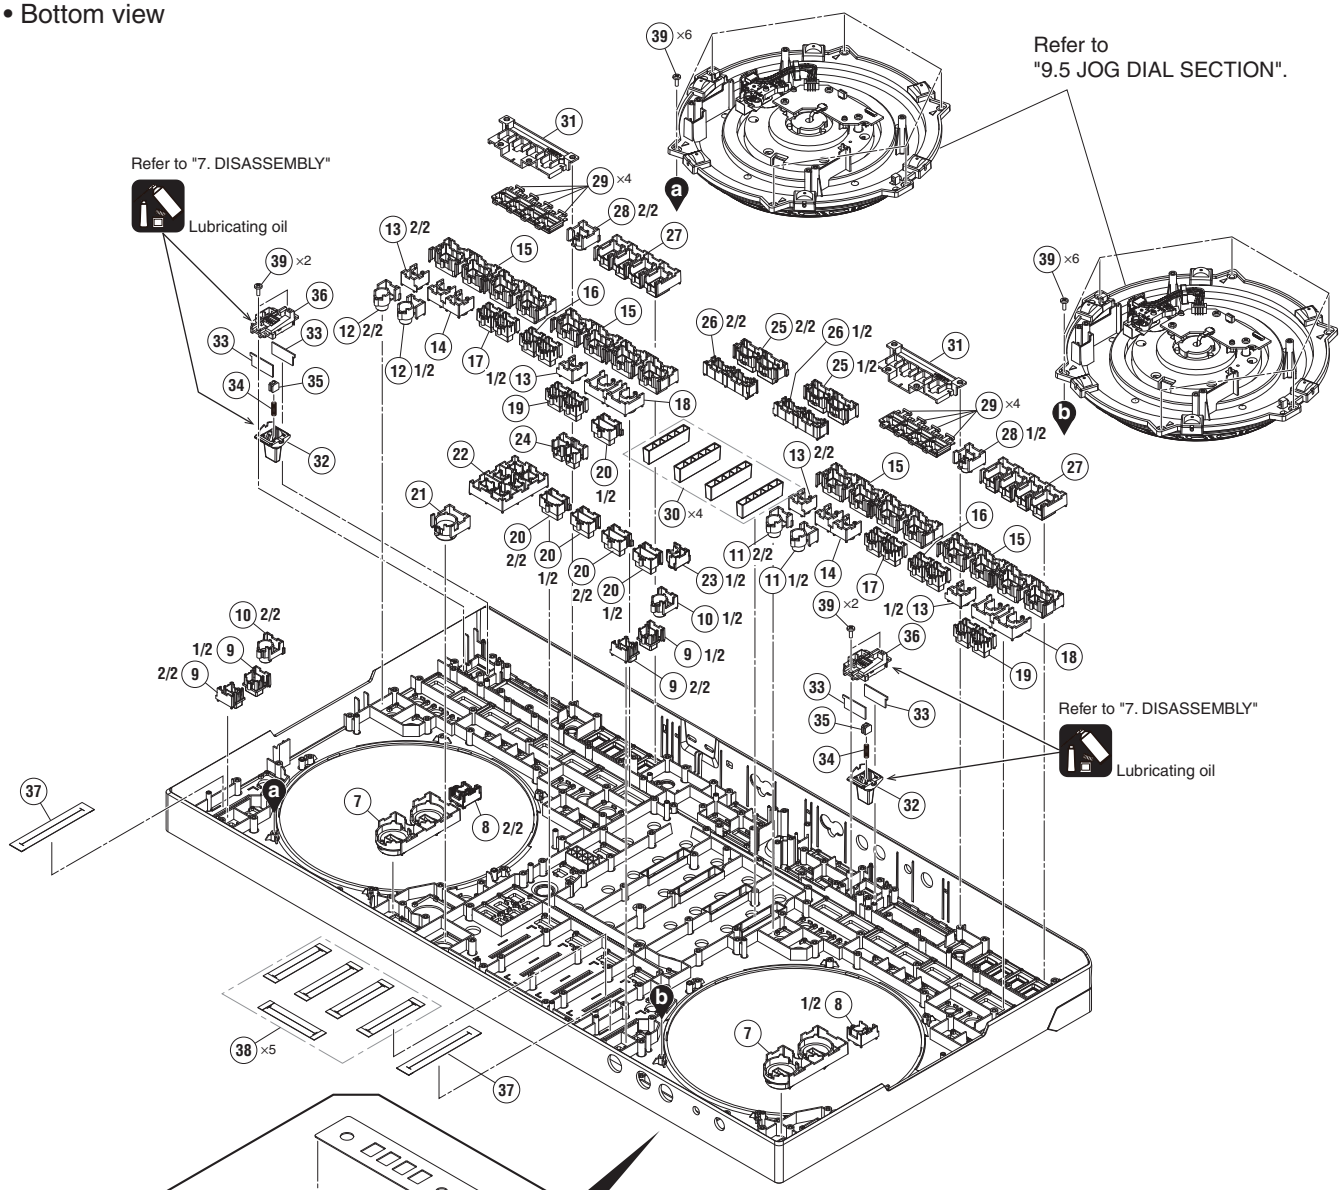

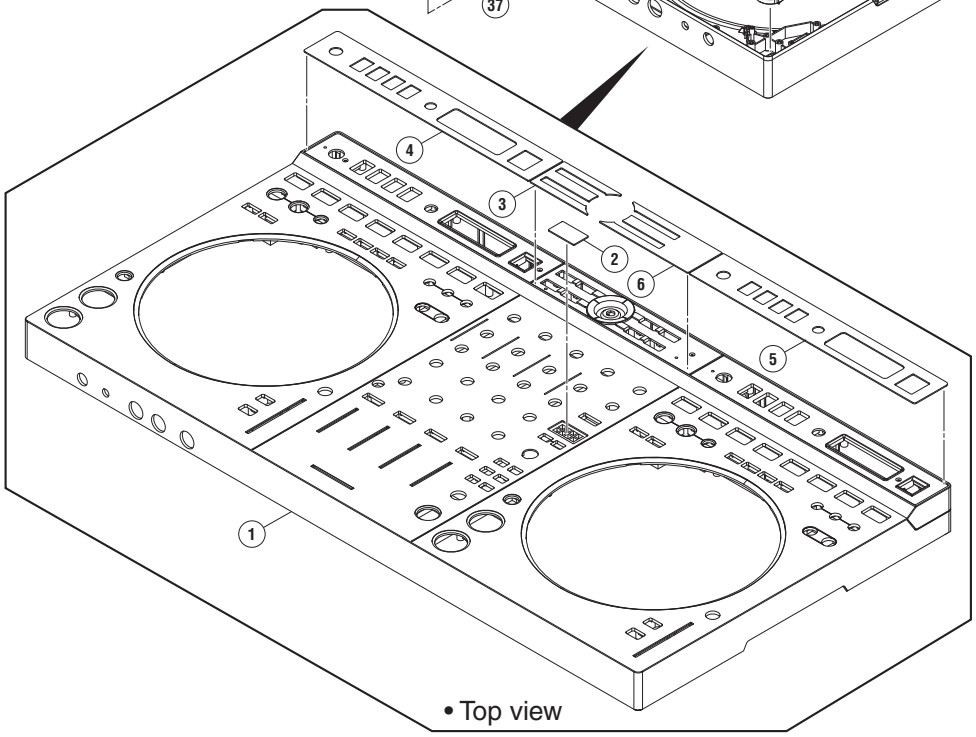

• Top view

● **Cut position**

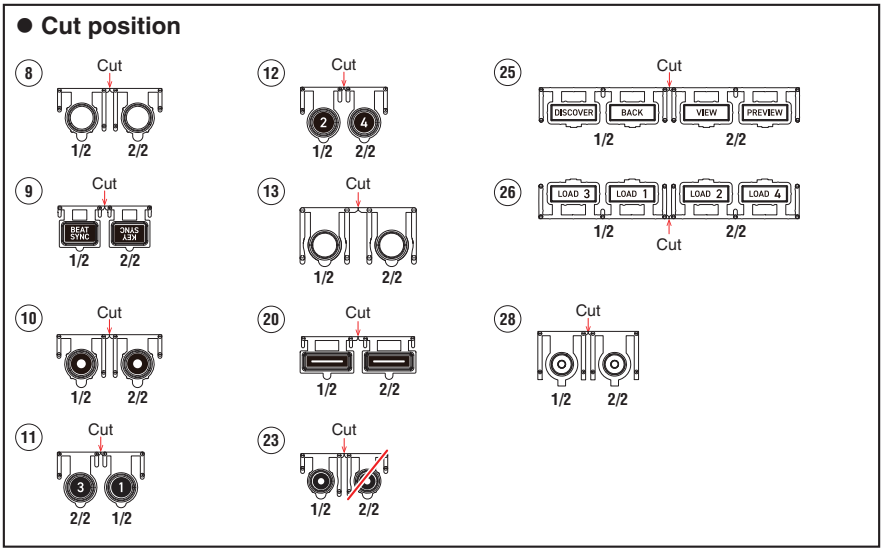

CONTROL PANEL (2/2) SECTION PARTS LIST

Mark	No.	Description	Part No.
⚠	1	Control Panel	DNK7216
	2	Plate	DAH3446
	3	Plate	DAH3447
	4	Plate	DAH3448
	5	Plate	DAH3449
	6	Panel	DAH3452
	7	Button	DAC3753
	8	Button	DAC3754
	9	Button	DAC3769
	10	Button	DAC3604
	11	Button	DAC3755
	12	Button	DAC3756
	13	Button/TMP	DAC2845
	14	Button/CAL	DAC3020
	15	Button	DAC3757
	16	Button	DAC3758
	17	Button	DAC3772
	18	Button	DAC3774
	19	Button	DAC3787
	20	Button	DAC3760
	21	Button	DAC3777
	22	Button	DAC3761
	23	Button	DAC3786
	24	Button	DAC3381
	25	Button	DAC3762
	26	Button	DAC3764
	27	Button	DAC3766
	28	Button	DAC3646
	29	Button	DAC3767
	30	Lens	DNK7223
	31	Holder	DNK7220
	32	Lever	DAC3768
	33	Brake	DEC3948
	34	Lever Spring	DBH1702
	35	Lever Cap	DNK5344
	36	Base	DNK6470
	37	Packing/TMP	DEC3392
	38	Sheet	DEC3795
	39	Screw	BPZ30P080FTC

9.5 JOG DIAL SECTION

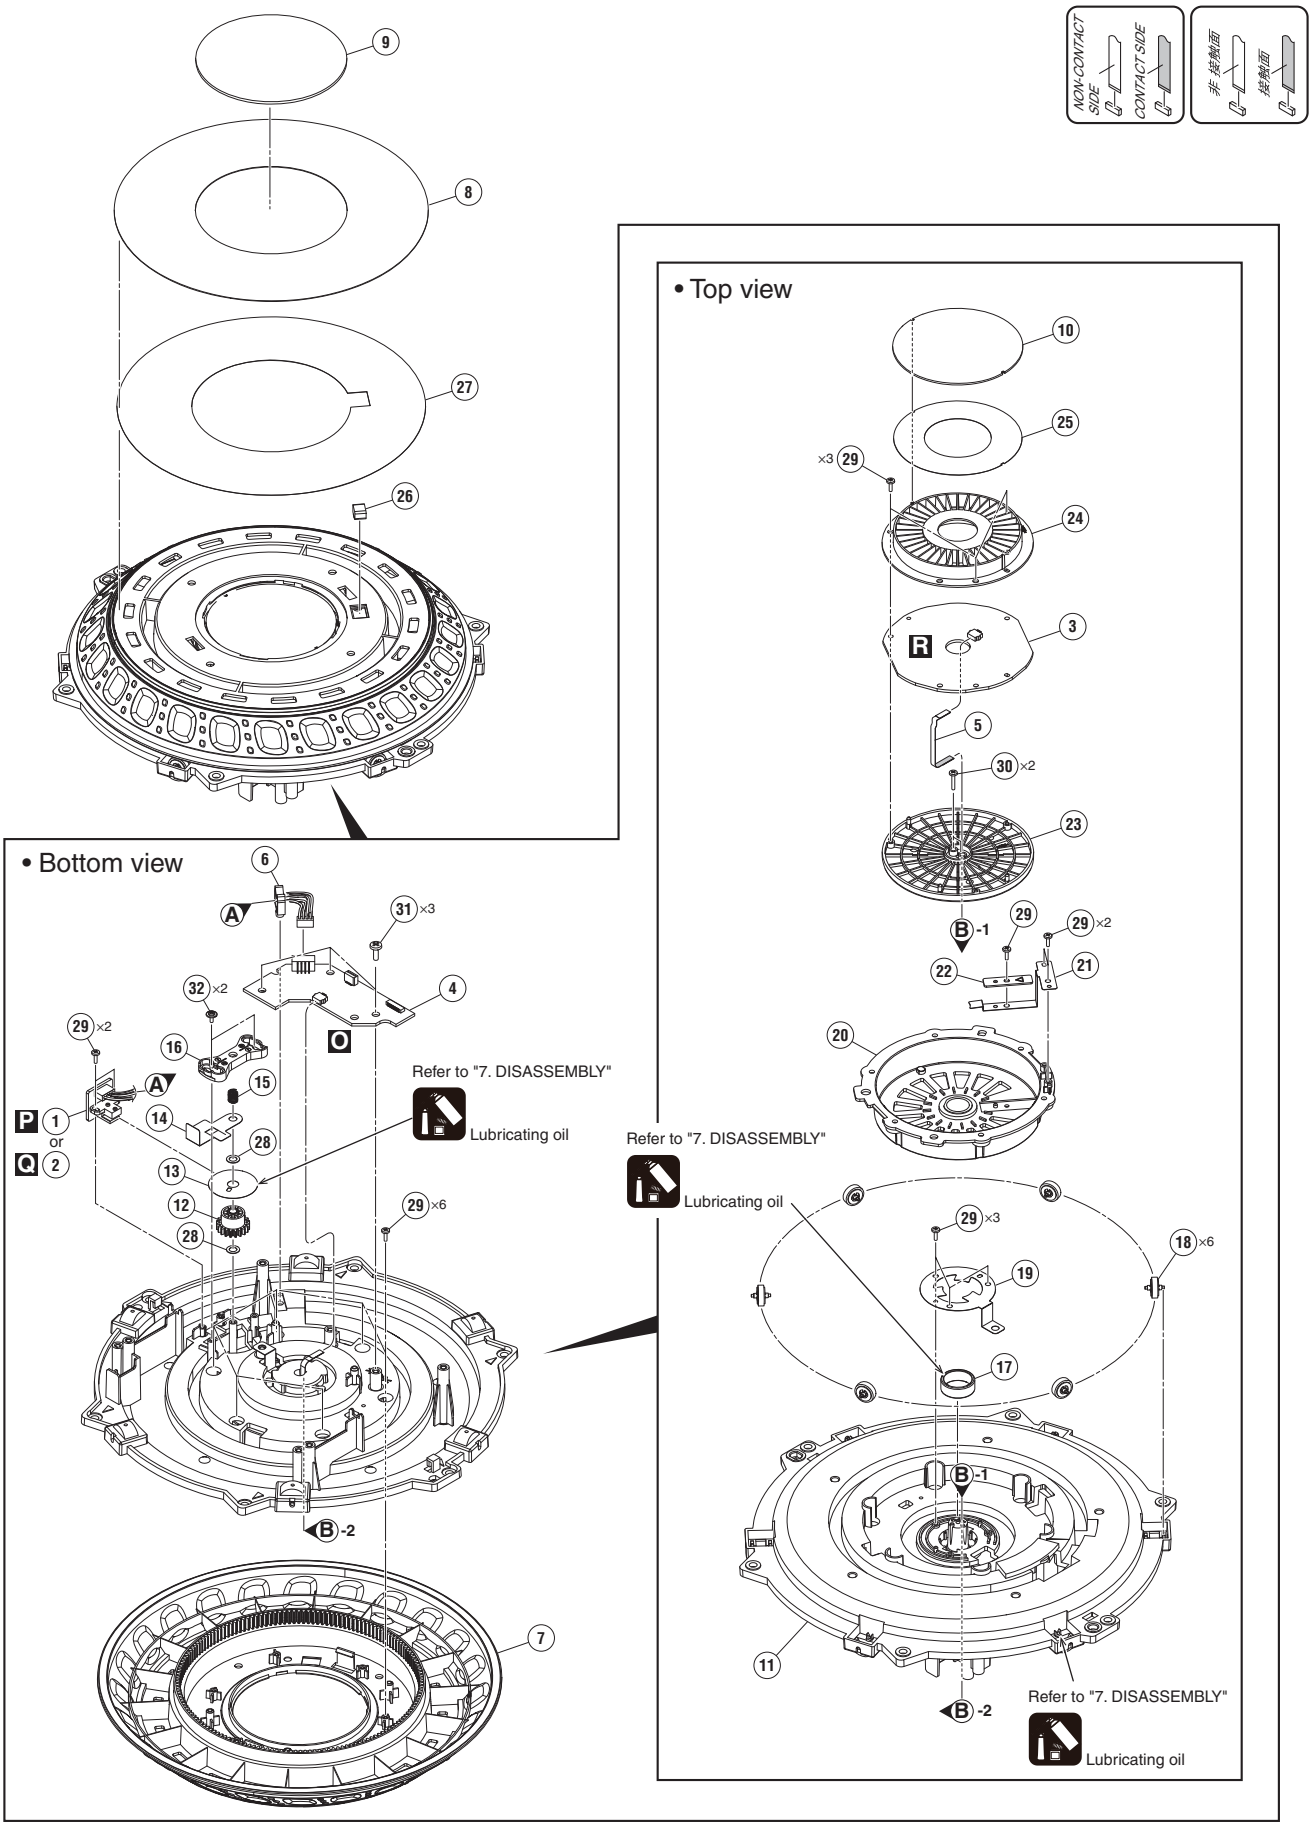

JOG DIAL SECTION PARTS LIST

Mark No.	Description	Part No.
1	JOGRT1 Assy	DWX5075
2	JOGRT2 Assy	DWX5076
3	JLED Assy	DWX5064
4	TCH Assy	DWX5066
5	FFC	DDD1986
6	Holder	VEC1355
7	Jog Dial	DNK7218
8	Plate	DAH3450
9	Window	DAH3307
10	Sheet	DEC4165
11	Holder	DNK7219
12	Gear	DNK6942
13	Plate	DEC3700
14	Sheet	DEC3979
15	Load Spring	DBH1676
16	Adjuster	DNK6956
17	Sleeve	DLA2278
18	Roller	DXB2178
19	Plate	DBK1400
20	Jog Dial	DNK6939
21	Leaf Spring	DBK1399
22	Plate	DNH3465
23	Holder	DNK6958
24	Reflector	DNK6941
25	Light-D Sheet	DEC3953
26	Gasket	DEC4056
27	DS Tape	DEH1112
28	Washer	WA41D070D025
29	Screw	BPZ20P060FTC
30	Screw	BPZ20P100FTC
31	Screw	BPZ30P080FTC
32	Screw (FE)	DBA1461

12. PCB PARTS LIST

NOTES: ● *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
● *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
● *When ordering resistors, first convert resistance values into code form as shown in the following examples.*

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47 k ohm (tolerance is shown by J = 5%, and K = 10%).

560 Ω	→	*56 × 10^1*	→	*561* ····· *RD1/4PU 5 6 1 J*
47 kΩ	→	*47 × 10^3*	→	*473* ····· *RD1/4PU 4 7 3 J*
0.5 Ω	→	*R50*		····· *RN2H R 5 0 K*
1 Ω	→	*1R0*		····· *RS1P 1 R 0 K*

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62 kΩ	→	*562 × 10^1*	→	*5621* ····· *RN1/4PC 5 6 2 1 F*

Mark	No.	Description	Part No.
LIST OF ASSEMBLIES			
	1	..MAIN ASSY	DWX5062
	1	..JTACT ASSY	DWX5097
NSP	1	..MIXER ASSY	DWM2921
	2	..MIXER ASSY	DWX5063
	2	..CRFD ASSY	DWX5072
	2	..LOAD ASSY	DWX5071
	2	..JKNOB ASSY	DWX5096
	2	..JOGRT1 ASSY	DWX5075
	2	..JOGRT2 ASSY	DWX5076
NSP	1	..JOGA ASSY	DWM2914
	2	..JLED ASSY	DWX5064
	2	..TCH ASSY	DWX5066
NSP	1	..PNL ASSY	DWM2915
	2	..PLAY1 ASSY	DWX5077
	2	..PLAY2 ASSY	DWX5078
	2	..HPJK ASSY	DWX5070
	2	..MIC ASSY	DWX5080
	2	..GRV2 ASSY	DWX5074
NSP	1	..DECK ASSY	DWM2916
	2	..DECKL ASSY	DWX5068
	2	..DECKR ASSY	DWX5073
	2	..GRV1 ASSY	DWX5069

Mark	No.	Description	Part No.
A MAIN ASSY			
SEMICONDUCTORS			
NSP	IC	301,302	BD93F52MWV
⚠NSP	IC	303	NJW4152GM1-AB@V
⚠	IC	304	FAN23SV06PAMPX@V
	IC	306	TPS2116DRL
	IC	307	MFI343S00176@V
	IC	308	S-80940CNMC-G9A
	IC	309,1804	S-80942CNMC-G9C
	IC	310	BD2242G-G
	IC	311,313,315,316	TC7SH08FUS2
	IC	312	TPS22919DCK
	IC	314	S-80944CNMC-G9EU
⚠	IC	501	BD8152FVM
⚠	IC	502	BD9851EFV
⚠	IC	503	BD9B100MUV@V
⚠	IC	504	BD9328EFJ
⚠	IC	505	NJM2831F06@V
⚠	IC	506	MM1899A50N
⚠	IC	507	MM1899A33N
⚠	IC	508	MM1856A50N
	IC	701,702	S-80930CNMC-G80
NSP	IC	703	MIMXRT1062DVJ6B@V
	IC	706,707,902,903	TC7SH08FUS2
	IC	901	DYW2403*
		*Part number of the initial firmware equipped	
	IC	1201	74VHC595FT
	IC	1202,1204	74VHC4051AFT
	IC	1203	TC74HC151AF
	IC	1401	PCM1789PWR@V
	IC	1402,1403,1601-1603	NJM4580MD
	IC	1801,1802	PCM1753DBQ
	IC	1803	PCM1803ADB
	IC	1805	NJM4580MD
	IC	1806	BH3547F
	Q	301,302,304,305	YJJ09N03A
	Q	303,903,1204	LTC044EEB
	Q	308,309	YJJ09N03A
	Q	313,314,320,512	MMBTSA1576QW
	Q	317,510,1202	LTA024EEB
	Q	318,319,501,505	LTC024EEB
	Q	502	RSQ035P03
	Q	503	LP3475T1G@V
	Q	504	RSQ045N03
	Q	506,509,516,1201	MMBTSC1623YW
	Q	513,517,518,1209	MMBTSA1576QW
	Q	515	LTC014YEB
	Q	703,1804	LTC024EEB
	Q	704	RTQ040P02
	Q	904,1203	LTA044EEB
	Q	1207,1803,1805,1806	MMBTSC1623YW
	Q	1601,1602,1605-1608	INC2002AC1
	Q	1807,1808	INC2002AC1
	D	301-310	EZAEG2N50A
	D	311,317,502,514	1SS355L@V
	D	313,503	RB060MM-30TF
	D	501,504,511	RB551VM-30
	D	505,509	RB501VM-40
	D	515,518-520	1SS355L@V
	D	522-525,701,1202	1SS355L@V
	D	1204,1206,1208	1SS355L@V

Mark	No.	Description	Part No.
	D	1803	RB548W
		MISCELLANEOUS	
	L	101-128,905-910 INDUCTOR	CTF1778
	L	301 COIL	ATH7015
	L	302 CHOKE COIL (15 uH)	CTH1487
	L	303 CHOKE COIL (3.6 uH)	CTH1479
	L	501,503 POWER INDUCTOR	ATH7011
	L	502 SMD SPL INDUCTOR	CTH1521
	L	504 SMD SPL INDUCTOR	CTH1531
	L	505 SMD SPL INDUCTOR	CTH1597
	L	506,507 SMD FERRITE BEADS	CTF1823
	L	701,704 SMD FERRITE BEADS	CTF1823
	L	702 POWER INDUCTOR	ATH7047
	L	705 SMD FERRITE BEADS	CTF1823
NSP	JA	301,302 USB JACK	DKN1694
	JA	1601,1602 6.5 DIA JACK	DKN1669
	JA	1603,1801 RCA JACK	DKB1125
	S	301 SLIDE SWITCH	DSH1025
	X	701 CRYSTAL RESONATOR (24.000 MHz)	DSS1241
	CN	101,109 FFC/FPC CONNECTOR	S100-DRF-40-T5
	CN	102,103 FFC/FPC CONNECTOR	S100-DRF-25-T5
	CN	104,106 FFC/FPC CONNECTOR	DKN1675
	CN	105,108 FFC/FPC CONNECTOR	S100-DRF-25-T5
	CN	107 CONNECTOR	HWW-SR1120-J1@V
	CN	1801 FFC/FPC CONNECTOR	S100-SSA-05-T2@V
		1601,1602 PHONE SHIELD	DNF1875
		9001,9002 SUPPORT	DNH3537
⚠	P	301,302 PROTECTOR(3.000A)	DEK1103
	VA	301,1601-1609 VARISTORS	EZJZ1V270RM
	VA	1801-1803 VARISTORS	EZJZ1V270RM
		RESISTORS	
	R	101	RC0603JR-07220RL@V
	R	305,323	RC0402JR-07200KL@V
	R	306,333	RC0805JR-070RL@V
	R	308,313,317,335	RC0402JR-070RL@V
	R	309,311,312,367	RC1206JR-07470RL@V
	R	310,349,510,736	RC0402JR-07100KL@V
	R	316,320,327,330	RC0402JR-07100RL@V
	R	318,321	RC0402FR-07110KL@V
	R	319,322	RC0402FR-0782KL@V
	R	324,363	RC0402FR-07200KL@V
	R	326,365,368,369	RC0402JR-0747KL@V
	R	336,337,582,995	RC0402JR-072K2L@V
	R	356,359,366,371	RC0402JR-07100RL@V
	R	357,361	RC0402FR-07160KL@V
	R	358,362	RC0402FR-0736KL@V
	R	360,375,404,416	RC0402JR-070RL@V
	R	372	RC0402FR-0727KL@V
	R	376,377,411,413	RC0402JR-0710KL@V
	R	382	RC0402FR-0710KL@V
	R	384,502,516,529	RC0402DR-0710KL@V
	R	386	RC0402FR-071KL@V
	R	388	RC0402FR-0733KL@V
	R	389	RC0402FR-073KL@V
	R	390	RC0402DR-076K8L@V
	R	391,424,428,475	RC0402JR-071KL@V
	R	393,594	RC0402DR-071K2L@V
	R	394	RC1206JR-072R7L@V
	R	395	RC0402DR-071KL@V

Mark	No.	Description	Part No.
	R	399	RC0402DR-0775KL@V
	R	400	RC0402JR-0712KL@V
	R	417,433,434,436	RC0402JR-070RL@V
	R	418	RC0402FR-0715KL@V
	R	419	RC0402FR-075K1L@V
	R	423,426,427,493	RC0402JR-0722KL@V
	R	435,437,440,441	RC0402JR-07100RL@V
	R	438,439,519,1203	RC0402JR-074K7L@V
	R	451,452,468,469	RC0402JR-070RL@V
	R	483,538,539,595	RC0603JR-070RL@V
	R	484,563	RC0402DR-07150KL@V
	R	485,571	RC0402JR-075K1L@V
	R	486	RC0402DR-07100RL@V
	R	487	RC0603JR-0710RL@V
	R	488	RC0402DR-07560RL@V
	R	491,492,536,537	RC0402JR-0747KL@V
	R	494,704,707	RC0402JR-07100RL@V
	R	496,497,506,526	RC0402JR-0710KL@V
	R	498	RC1206JR-07470RL@V
	R	501	RC0402DR-0715KL@V
	R	503,525	RC0402DR-0730KL@V
	R	504,527	RC0402DR-0768KL@V
	R	505,578	RC0402JR-075K6L@V
	R	508,509,565	RC0402DR-0747KL@V
	R	511,596,708,709	RC0402JR-070RL@V
	R	512,532	RC0402DR-0712KL@V
	R	517	RC0402DR-07180KL@V
	R	518,524	RC0603JR-0722RL@V
	R	523,701,703,904	RC0402JR-071KL@V
	R	528	RC0402DR-076K2L@V
	R	531	RC0402DR-0733KL@V
	R	533,572,593	RC0402DR-0727KL@V
	R	540,1839,1840	RC0603JR-07470RL@V
	R	545,553,559,567	RC0402JR-0710KL@V
	R	554	RC0402JR-0730KL@V
	R	555,556,930,1211	RC0402JR-0722KL@V
	R	557,558	RC1206JR-0710RL@V
	R	569	RC0402JR-0722RL@V
	R	574	RC0402DR-0710KL@V
	R	576,577,581	RC0402JR-0715KL@V
	R	579	RC0402JR-07560RL@V
	R	580	RC0402JR-076K8L@V
	R	591	RC0402DR-0718KL@V
	R	592,604	RC0402DR-073K9L@V
	R	597,935,942,953	RC0402JR-0733KL@V
	R	598	RC0402JR-0768KL@V
	R	599	RC0402JR-072KL@V
	R	600	RC0402JR-073K3L@V
	R	601	RC0402DR-071K5L@V
	R	602	RC0402DR-075K6L@V
	R	603	RC0402DR-078K2L@V
	R	605,735,738,923	RC0402JR-0710KL@V
	R	705,1830	RC0402JR-072M2L@V
	R	729-734,901	RC0402JR-07100RL@V
	R	739,937,1087,1236	RC0402JR-0747KL@V
	R	740,902,905,909	RC0402JR-0756RL@V
	R	906-908,910,911	RC0402JR-07100RL@V
	R	912,914,920,921	RC0402JR-0756RL@V
	R	913,915,917-919	RC0402JR-07100RL@V

Mark	No.	Description	Part No.
	R	916	RT0402DRD07100RL@V
	R	922,932-934,941	RC0402JR-07100RL@V
	R	926,1832	RC0402JR-07100KL@V
	R	931	RT0402DRD0722RL@V
	R	936,938-940	RC0402JR-0756RL@V
	R	943-946,954-956	RC0402JR-0756RL@V
	R	947,948,950,952	RC0402JR-07100RL@V
	R	957,959,962,964	RC0402JR-0733KL@V
	R	958,960,968-970	RC0402JR-0756RL@V
	R	961,1226-1228,1814	RC0402JR-070RL@V
	R	963,965-967,974	RC0402JR-07100RL@V
	R	972,973,982,983	RC0402JR-07220RL@V
	R	975,985-987,996	RC0402JR-07100RL@V
	R	976,1031,1047,1057	RC0402JR-0733KL@V
	R	977-981,989-993	RC0402JR-0756RL@V
	R	997,1089,1090	RC0402JR-072K2L@V
	R	998-1000,1035-1037	RC0402JR-07100RL@V
	R	1001	RAB4CQ101J
	R	1002,1043,1235,1405	RC0402JR-0710KL@V
	R	1032,1044-1046,1048	RC0402JR-0756RL@V
	R	1033,1034,1038,1039	RC0402JR-07220RL@V
	R	1040,1041,1060-1067	RC0402JR-07100RL@V
	R	1042,1049,1052,1053	RC0402JR-07220RL@V
	R	1050,1051,1054-1056	RC0402JR-0756RL@V
	R	1058,1073-1075,1078	RC0402JR-0756RL@V
	R	1059,1068-1072,1076	RC0402JR-0733KL@V
	R	1077	RC0402JR-0733KL@V
	R	1079,1205-1207,1209	RC0402JR-07100RL@V
	R	1080,1081,1086,1088	RC0402JR-0756RL@V
	R	1082,1083,1202,1220	RAB4CQ560J
	R	1201,1219	RAB4CQ472J
	R	1204,1216,1217,1835	RC0402JR-074K7L@V
	R	1210,1212,1218,1222	RC0402JR-07100RL@V
	R	1213-1215,1224,1240	RC0402JR-0722KL@V
	R	1221,1406,1407,1801	RC0603JR-070RL@V
	R	1223,1225,1258	RC0402JR-07100RL@V
	R	1237,1244,1245,1810	RC0402JR-0747KL@V
	R	1241,1242	RC0402JR-0711KL@V
	R	1246,1247,1837,1838	RC0402JR-0722KL@V
	R	1261-1263,1402,1819	RC0402JR-07100RL@V
	R	1265,1266	RC0402JR-0756RL@V
	R	1404	RC0402JR-07220KL@V
	R	1413-1420	RT0603DRD0710KL@V
	R	1421-1428	RC0603DR-073K9L@V
	R	1429,1432,1433,1436	RC0603DR-071K5L@V
	R	1430,1431,1434,1435	RC0603DR-073K3L@V
	R	1437,1440,1441,1444	RC0603DR-071K5L@V
	R	1438,1439,1442,1443	RC0603DR-073K3L@V
	R	1606-1609	RC0603DR-073K6L@V
	R	1610-1617	RC0603DR-075K6L@V
	R	1618-1621	RC0603DR-072K7L@V
	R	1622-1629	RC0603DR-076K8L@V
	R	1630-1633	RC0603DR-071K5L@V
	R	1634-1637	DCN1200
	R	1638,1639,1652-1655	RC0603JR-076K8L@V
	R	1640-1643	RC0603DR-072K2L@V
	R	1644-1647,1658,1659	RC0603JR-07100KL@V
	R	1660,1663,1664	RC0603JR-0733RL@V
	R	1667-1671,1851,1852	RC0603JR-0733RL@V
	R	1802	RC0603JR-0710KL@V
	R	1803	RC0603DR-07220RL@V
	R	1804,1805,1812,1813	RC0402JR-0710KL@V
	R	1808,1809	RC0603JR-070RL@V
	R	1811	RC0402JR-0747KL@V
	R	1818	RC0402JR-07220RL@V
	R	1822,1823	RC0603DR-078K2L@V
	R	1824,1825	RC0603DR-0713KL@V
	R	1826,1827	RC0603JR-07270RL@V
	R	1828,1829	RC0603DR-075K1L@V
	R	1831,1834	RC0402JR-0710KL@V
	R	1833,1869-1871	RC0402JR-070RL@V
	R	1836	RC0402JR-074K7L@V
	R	1841,1842	RC0603JR-07100KL@V
	R	1843,1844	RC0603JR-076K8L@V
	R	1845-1848	RC0603DR-07330RL@V
NSP		Other Resistors	RS1/4SA###J

CAPACITORS

	C	101,102,104,106	0402B104K160CT
	C	103,105,108,109	0402B102K500CT
	C	107,112-117,121	0402B104K160CT
	C	110,119,311,312	0402B104K250CT
	C	111,118,120,123	0402B102K500CT
	C	122,124,126,127	0402B104K160CT
	C	125,350,365,372	0402B102K500CT
	C	128,129,578,601	0805X226M100CT
	C	301,304,584,1224	0402X105K250CT
	C	302,305,307,308	0402B103K500CT
	C	303,306,403,419	0402N101J500CT
	C	309,310,369,373	0402N102J500CT
	C	319,320,577,589	0402X474K250CT
	C	321,323,334,337	0402X105K160CT
	C	322,335	0805X475K250CT
	C	324,338,388,395	0402B104K160CT
	C	329,343	0402N100J500CT
	C	330,331,344-346	0603X105K500CT
	C	332,336,347,357	0402B104K250CT
	C	339,399,404,410	0402X105K160CT
	C	348,355,376,387	0805X106K250CT
	C	349,363,367,374	0402X104K250CT
	C	353,356,358,377	DCG1066
	C	359,930,988,1877	0402N471J500CT
	C	361,370,371,381	0402B104K250CT
	C	362,710,712,719	0402B103K500CT
	C	366	0402N221J500CT
	C	375,402,406,505	0402B102K500CT
	C	378,380 (22 uF)	DCG1066
	C	383,385 (1000 uF/10 V)	DCH1396
	C	384,417,420,566	0402B104K250CT
	C	386,427	0402X104K250CT
	C	389,522,546,549	0402B103K160CT
	C	390,565,574,1403	ACE7129
	C	397 (100 uF/35 V)	DCH1366
	C	401,405,411,414	0402B104K160CT
	C	407	0603B222K500CT
	C	412,502,526,532	0402X105K160CT
	C	416,421,548,572	0603X225K250CT
	C	418	0603B334K250CT
	C	422,429,430,503	0402B104K160CT

Mark	No.	Description	Part No.
	C	423,509,721,760	0402X105K100CT
	C	501	0603X106K100CT
	C	506,510	0402B332K500CT
A	C	507,551	0402B472K500CT
	C	514,529,592,755	0805X106K100CT
	C	516,518,531,533	0402B104K160CT
	C	519	0402N561J500CT
	C	521,524,530,550	0402N102J500CT
	C	535,538,547,553	0402B104K160CT
	C	536,594,599,607	0402B102K500CT
	C	539	0603X225K160CT
	C	541,571,576,580	0402X105K160CT
	C	542,554 (10 uF/25 V)	DCH1381
B	C	544	0402B682K500CT
	C	552,556,562,569	0402N102J500CT
	C	555,557,622,623	0402B103K160CT
	C	558,563,570,595	0402B104K160CT
	C	561,568,586,615	0402N101J500CT
	C	573,575,582,587	0402N102J500CT
	C	581,583 (470 uF/10 V)	DCH1394
	C	588,772	0402X105K160CT
	C	590,763 (0.01 uF)	ACE7113
	C	596,600,606,609	0402B104K160CT
	C	597,1228,1872	0402B103K250CT
C	C	598	0402N181J500CT
	C	604,1421	0805X106K160CT
	C	610,617,644,645	0402B104K160CT
	C	612,1402	0402B473K160CT
	C	616,752,773,782	0402B102K500CT
	C	618,619,743,797	0603X106K6R3CT
	C	624,625,1614,1631 (100 uF/16 V)	DCH1387
	C	628,629,640,729	0402B103K160CT
	C	632,638,639,707	0402N102J500CT
	C	652,653	0603X475K160CT
D	C	701,703,705,706	0402B104K160CT
	C	702,704,715,722	0603X475K6R3CT
	C	709,718,728,747	0402B104K160CT
	C	711 (100 uF/16 V)	DCH1365
	C	713,731,769,770	0402N102J500CT
	C	714	0603B473K160CT
	C	716,717,753	0805X226M100CT
	C	723,726,730,733	0402B224K160CT
	C	724,727,741,744	0603X475K6R3CT
	C	725,734	0402N6R0C500CT
	C	732,1880,1881	0402B103K500CT
E	C	735-740,742,746	0402B224K160CT
	C	750,757,768,771	0402B104K160CT
	C	751,756,759,761	0402B224K160CT
	C	762	0402B224K160CT
	C	765	0603X475K6R3CT
	C	766,1641-1646 (1000 pF)	ACE7099
	C	774,775,778,781	0402B104K160CT
	C	776,779,786	0402N102J500CT
	C	777,780,794,802	0402N101J500CT
	C	785,788,919,922	0402B103K160CT
	C	787,796,918,921	0402B104K160CT
F	C	789-791,920,923	0402N102J500CT
	C	792	0603B334K100CT
	C	795,906,908,909	0402B102K500CT

Mark	No.	Description	Part No.
	C	800,1806,1807	0402B104K250CT
	C	907,910,915,924	0402N101J500CT
	C	911-913,916	0402B102K500CT
	C	914,1895,1896	0402B222K500CT
	C	925,927-929	0402N101J500CT
	C	934-937,942,943	0402N101J500CT
	C	938,952,953,955	0402N331J500CT
	C	954,956,961-963	0402N101J500CT
	C	966,1204,1210,1218	0402B104K160CT
	C	967-970,981,983	0402N331J500CT
	C	980,989-991,1409 (220 uF/16 V)	0402N101J500CT
	C	984,987,1410,1830	0402N331J500CT
	C	1201-1203,1205-1209	0402N102J500CT
	C	1213-1217,1219-1222	0402N102J500CT
	C	1225	0402X105K250CT
	C	1226,1616,1632	DCH1391
	C	1230,1233-1235	0402N102J500CT
	C	1232,1423,1424,1653	0402B104K160CT
	C	1237-1239,1408,1412	0402N102J500CT
	C	1401,1437	DCH1368
	C	1404,1411,1418,1425	0402B103K160CT
	C	1405,1426 (220 uF/16 V)	ACE7100
	C	1406,1422	0603B105K160CT
	C	1407	0402B472K250CT
	C	1413,1419,1456-1459	0402N101J500CT
	C	1420,1601,1602,1606	0402N102J500CT
	C	1427 (1 uF)	ACE7129
	C	1444-1447	0603N201J500CT
	C	1448-1455	0603N181J500CT
	C	1603-1605	0402N681J500CT
	C	1611,1612,1617-1619	0603N101J500CT
	C	1613,1615,1620,1624	0402B103K160CT
	C	1621,1622,1625,1626	0603N101J500CT
	C	1627,1630,1805,1929	0402B103K160CT
	C	1628	0603N101J500CT
	C	1635,1636	VGV107M016ANE01K
	C	1637-1640 (220 uF/16 V)	DCH1391
	C	1647,1649,1651	0603B103K500CT
	C	1654,1804,1823,1834	0402B104K160CT
	C	1801,1822,1890	VGV476M6R3ANC01K
	C	1802,1808-1811,1824	0402N102J500CT
	C	1821,1851,1879	VGV106M016ANB01K
	C	1832	0402N331J500CT
	C	1835,1838,1861,1862	0805X106K100CT
	C	1839,1844,1852,1853	0402B104K160CT
	C	1843,1850	0805X106K250CT
	C	1854,1873,1891,1897	0402N102J500CT
	C	1863,1864,1893,1894	VGV226M016ANC01K
	C	1874,1875	0603X105K250CT
	C	1876,1885,1886	0402B104K160CT
	C	1878	0402N471J500CT
	C	1882,1883	0402N151J500CT
	C	1884	0603X475K100CT
	C	1892	0805X106K100CT
	C	1898	0603B104K500CT

Mark	No.	Description	Part No.
PNL ASSY			
Consists of			
PLAY1 ASSY			
PLAY2 ASSY			
HPJK ASSY			
MIC ASSY			
GRV ASSY			

B C F G K

PNL ASSY

SEMICONDUCTORS

IC	2401		NJM4565MD
Q	2401,2402		2SK209
Q	2805-2808		INC2002AC1
Q	7501,7503,7505,7507		MMDT521MW
Q	7502,7504,7506,7508		ISA1602AM1
Q	7509,7510		RT1P241M-11
Q	8001,8003,8005,8007		MMDT521MW
Q	8002,8502		MMBTSC1623YW
Q	8004,8006,8008,8010		ISA1602AM1
Q	8009,8011,8501,8503		MMDT521MW
Q	8012,8504,8506,8508		ISA1602AM1
Q	8505,8507,8509,8511		MMDT521MW
Q	8510,8512		ISA1602AM1
D	2805-2808		DF2B18FU
D	7501-7508,7527		1SS355L@V
D	7509,7511,7513,7515		LTL17KYRN5D-P@V
D	7517,7519,7521,7523		LTL17KYRN5D-P@V
D	7525,8007,8507		LTL17KYRN5D-P@V
D	8001-8004,8501-8504		1SS355L@V
D	8005,8505		LTL17KTGP4J-P@V
D	8009,8509		LTW-1GHCW4-P(A)@V
D	8011,8511		LTL17KTBP5D@V
D	8013,8513		LTL17KRN8D@V

MISCELLANEOUS

JA	2401,2804	6.5 DIA JACK	DKN1669
JA	2803	STEREO MINI JACK	XKN3017
KN	2802	SCREW PLATE	VNE1948
S	7501-7508,8001	TACTILE SWITCH	DSG1157
S	7509,8002,8006,8502	TACT SWITCH	DSG1079
S	8003-8005,8501	TACTILE SWITCH	DSG1157
S	8503-8505	TACTILE SWITCH	DSG1157
S	8506	TACT SWITCH	DSG1079
CN	2401	5P CONNECTOR	VKN1820
CN	2802	CONNECTOR	HWW-R1120-J1@V
CN	7501	27P CONNECTOR	VKN1258
CN	8001,8501	25P CONNECTOR	VKN1256
	9001	PHONE SHIELD	DNF1875
PC	7501,7502	PHOTO INTERRUPTER	GP1S094HCZ0F
VA	2401-2403,2812,2813	VARISTORS	EZJZ1V270RM
VA	8001,8002,8501,8502	VARISTORS	EZJZ1V270RM

RESISTORS

R	2401,2402		RC0603JR-07100RL@V
R	2403,2404		RC0603JR-07120RL@V
R	2405,2406		RC0603DR-073K3L@V
R	2407,2414		RC0603DR-071K8L@V
R	2408,2411		RT0603DRD071KL@V
R	2409,2413		RT0603DRD073K3L@V
R	2410		RC0603DR-073KL@V
R	2412		RT0603DRD07150RL@V
R	2415,2419		RC0603JR-070RL@V
R	2417		RC0603DR-071K2L@V
R	2418		RC0603DR-0756KL@V
R	2811,2812,2818,2819		RC0603JR-0710KL@V
R	2813,2814,8027,8527		RC0603JR-071KL@V
R	2817,7501		RC0603JR-071ML@V
R	7502,7509,7516,7523		RC0603JR-0722KL@V
R	7503,7510,7517,7524		RC0603JR-07820RL@V
R	7504,7511,7518,7525		RC0603JR-0747KL@V
R	7505-7508,7512-7515		RC0603JR-07330RL@V
R	7519-7522,7526,7528		RC0603JR-07510RL@V
R	7527		RC0603JR-07620RL@V
R	7530,7531		RC0603JR-07510RL@V
R	7532,7534,8004,8009		RC0603JR-0747KL@V
R	7533,7535,8012,8512		RC0603JR-07220RL@V
R	7536-7544,8030-8034		RC0805JR-070RL@V
R	8001,8002,8501,8502		RC0603DR-072K2L@V
R	8003,8503		RC0603JR-072K2L@V
R	8005,8010,8015,8020		RC0603JR-0722KL@V
R	8006,8011,8016,8021		RC0603JR-07820RL@V
R	8007,8507		RC0603JR-07200RL@V
R	8014,8019,8024,8028		RC0603JR-0747KL@V
R	8017,8517		RC0603JR-07470RL@V
R	8022,8023,8522,8523		RC0603JR-07750RL@V
R	8025,8505,8510,8515		RC0603JR-0722KL@V
R	8026,8506,8511,8516		RC0603JR-07820RL@V
R	8504,8509,8514,8519		RC0603JR-0747KL@V
R	8520,8525		RC0603JR-0722KL@V
R	8521,8526		RC0603JR-07820RL@V
R	8524,8528		RC0603JR-0747KL@V
R	8530-8534		RC0805JR-070RL@V
VR	2401	POTENTIOMETER	DCS1111
VR	2804,2806	ROTARY VR	DCS1071
VR	2805	ROTARY VR	DCS1148
VR	7501	POTENTIOMETER	DCS1096
VR	8001,8501	VARIABLE RESISTOR	DCV1011

CAPACITORS

C	2401-2404,2433-2437		0603B102K500CT
C	2408,2414,2415,2429		0603N102J500CT
C	2409,2422,2428,7501		0603B104K500CT
C	2412,2413,2417,2421		0603B222K500CT
C	2416		0603N471J500CT
C	2419		0603B103K250CT
C	2420,8011,8511		0603N331J500CT
C	2423		KRN106M035A5E07K
C	2424,2425,2819,8008		KS7476M016A5C07K
C	2430,7510,8002,8007		0603N102J500CT
C	2431,2432		0603B104K160CT
C	2820,2829-2831,7503		0603B104K250CT
C	2821,2822		KRN477M6R3A5H1CK
C	2823-2826		0603B223K500CT
C	2834,2836		0603B103K500CT
C	7502,7505		0603X106K100CT
C	7506,7509,7513,7514		0603B104K250CT
C	7508,8005,8505		KS7106M035A5B07K
C	8003,8006,8009,8503		0603B104K250CT
C	8502,8507		0603N102J500CT

Mark	No.	Description	Part No.
	C	8506,8509	0603B104K250CT
	C	8508	KS7476M016A5C07K

MIXER ASSY
Consists of
MIXER ASSY
CRFD ASSY
LOAD ASSY
JKNOB ASSY
JOGRT1 ASSY
JOGRT2 ASSY

D E L N P Q

MIXER ASSY

SEMICONDUCTORS

	IC	6011	TC74VHC595F
	IC	6301,6321,6341	TC74HC4051AF
	Q	4801,4803,4805,4807	MMDT521MW
	Q	4802,4804,4806,4808	ISA1602AM1
	Q	6001,6101	MMBTSC1623YW
	Q	6102-6107	LTC123JUB
	Q	6108,6110,6112,6114	MMDT521MW
	Q	6109,6111,6113,6115	ISA1602AM1
	Q	6116,6118,6120,6122	MMDT521MW
	Q	6117,6119,6121,6123	ISA1602AM1
	Q	6301-6304	MMDT5212W
	D	4801,4807,6103,6115	LTL17KRN8D@V
	D	4803,4805,6113	LTW-1GHCW4-P(A)@V
	D	4811-4818,6001	1SS355L@V
	D	6101,6154,6156,6164	LTL17KTBP5D@V
	D	6105,6107,6117,6119	LTL17KYRN5D-P@V
	D	6109,6111,6121,6123	LTL17KGP5D-P@V
	D	6125,6126,6130,6132	LTL17KYRN5D-P@V
	D	6128,6141	LTL17KRN8D@V
	D	6134,6136,6147,6149	LTL17KGP5D-P@V
	D	6138,6139,6143,6145	LTL17KYRN5D-P@V
	D	6151,6152,6158,6159	LTL17KYRN5D-P@V
	D	6161,6162	LTL17KYRN5D-P@V
	D	6166,6168,6170,6172	LTL17KTBP5D@V
	D	6174,6176,6178,6180	LTL17KTBP5D@V
	D	6182,6184,6186	LTL17KTBP5D@V
	D	6301-6318,6361,6362	1SS355L@V
	D	6365,6366,6371,6372	1SS355L@V
	D	6375,6376	1SS355L@V

MISCELLANEOUS

	S	4801-4808,6305 TACT SWITCH	DSG1079
	S	4901 ROTARY ENCODER	DSX1153
	S	6301-6303,6306 TACTILE SWITCH	DSG1157
	S	6304 ROTARY ENCODER	DSX1137
	S	6307-6309,6311-6315 TACT SWITCH	DSG1079
	S	6310,6320 TACTILE SWITCH	DSG1157
	CN	2601 CONNECTOR	HWW-L0520-J1@V
	CN	4801 19P CONNECTOR	VKN1279
	CN	4802 13P CONNECTOR	VKN1244
	CN	4901 7P CONNECTOR	VKN1267
	CN	6001 CONNECTOR	HWW-R0520-J1@V
	CN	6002,6003 25P CONNECTOR	VKN1256
	CN	6004 19P CONNECTOR	VKN1250
	JP	3401,3451 CONNECTOR ASS'Y	PF04PG-Q07
	PC	3401,3451 PHOTO INTERRUPTER	KE-2N18-15
	VA	2601 VARISTORS	EZJZ1V270RM

RESISTORS

	R	3401,3402,3451,3452	RC0603JR-07100RL@V
	R	3403,3453	RC0603JR-0782RL@V
	R	4801,4804,4807,4810	RC0603JR-0722KL@V
	R	4802,4805,4808,4811	RC0603JR-07820RL@V
	R	4803,4806,4809,4812	RC0603JR-0747KL@V
	R	4821,4827	RC0603JR-07560RL@V
	R	4823,4825	RC0603JR-07390RL@V
	R	6011,6016	RC0603JR-070RL@V
	R	6012-6015,6018-6021	RC0603JR-0756RL@V
	R	6017,6024-6026	RC0603JR-074K7L@V
	R	6022,6023,6344-6347	RC0603JR-07100RL@V
	R	6101	RC0603JR-072K2L@V
	R	6102,6127-6134	RC0603JR-0747KL@V
	R	6103,6105	RC0603JR-072K7L@V
	R	6111,6113,6115,6117	RC0603JR-0722KL@V
	R	6112,6114,6116,6118	RC0603JR-07820RL@V
	R	6119,6121,6123,6125	RC0603JR-0722KL@V
	R	6120,6122,6124,6126	RC0603JR-07820RL@V
	R	6141,6148,6155,6162	RC0603JR-07820RL@V
	R	6142,6143,6149,6150	RC0603JR-07470RL@V
	R	6144,6145,6151,6152	RC0603JR-07160RL@V
	R	6146	RC0603JR-07680RL@V
	R	6153,6160,6167,6171	RC0603JR-07270RL@V
	R	6156,6157,6163,6164	RC0603JR-07470RL@V
	R	6158,6159,6165,6166	RC0603JR-07160RL@V
	R	6169,6170,6175-6178	RC0603JR-07470RL@V
	R	6173	RC0603JR-07270RL@V
	R	6179-6181,6184-6192	RC0603JR-07750RL@V
	R	6182,6183	RC0603JR-07470RL@V
	R	6301-6303,6321-6323	RC0603JR-0722RL@V
	R	6341-6343	RC0603JR-0722RL@V
	R	6348-6351	RC0603JR-07220KL@V
	R	6401-6404,6421,6422	RC0603JR-071ML@V
	VR	2601 VARIABLE RESISTOR	DCV1023
	VR	6361,6365,6371,6375 SLIDE VR	DCV1035
	VR	6401-6404 VARIABLE RESISTOR	DCS1045
	VR	6405-6420,6423 POTENTIOMETER	DCS1097
	VR	6421,6422 VARIABLE RESISTOR	DCS1045

CAPACITORS

	C	2601,6302-6305	0603N471J500CT
	C	2602,4802,6006-6008	0603B104K250CT
	C	3401,3451	0603X105K250CT
	C	3402,3452,6320	0603B103K500CT
	C	4801	KS7106M035A5B07K
	C	4803,6306-6308	0603N102J500CT
	C	6001	KS7476M016A5C07K
	C	6002,6004,6014,6016	0603B102K500CT
	C	6003,6005	KS7476M6R3A5B07K
	C	6011,6015,6101-6108	0603B104K250CT
	C	6301,6321,6341	0603B104K250CT
	C	6309-6312,6322-6325	0603N471J500CT
	C	6326-6328,6346-6348	0603N102J500CT
	C	6329-6332,6342-6345	0603N471J500CT
	C	6349-6352	0603N471J500CT
	C	6361,6365,6371,6375	0603B104K500CT

Mark	No.	Description	Part No.
C	6401-6423		0603B104K500CT
C	6424,6425		0603N102J500CT

DECK ASSY
Consists of
DECKL ASSY
DECKR ASSY
GRV1 ASSY

H I J

DECK ASSY

SEMICONDUCTORS

IC	4000,5001		TC74VHC595F
IC	4001,5002		TC74HC151AF
Q	4000,4002,4004,4006		MMDT521MW
Q	4001,4003,4005,4007		ISA1602AM1
Q	4008,4010,4012,4014		MMDT521MW
Q	4009,4011,4013,5002		ISA1602AM1
Q	4015,4020,5001,5003		MMDT521MW
Q	4016-4019,4021		MMBTSC1623YW
Q	5004,5006,5008,5010		ISA1602AM1
Q	5005,5007,5009,5011		MMDT521MW
Q	5012,5014,7039,7041		ISA1602AM1
Q	5013,5015-5017,7038		MMDT521MW
Q	5018-5022		MMBTSC1623YW
Q	7040,7042,7044		MMDT521MW
Q	7043,7045		ISA1602AM1
Q	7046,7047		RT1P241M-11
D	4000-4013,4050		1SS355L@V
D	4014,4016,4022,4024		LTL17KTBP5D@V
D	4018,4026,5018,5026		LTL17KYRN5D-P@V
D	4020,4028,4046,5020		LTL17KRN8D@V
D	4030,4032,4034,4036		LTL17KTBP5D@V
D	4038,4040,4042,4044		LTL17KTBP5D@V
D	4048,5044		LTW-1GHCW4-P(A)@V
D	5001-5013,5049		1SS355L@V
D	5014,5016,5022,5024		LTL17KTBP5D@V
D	5028,5030,5032,5034		LTL17KTBP5D@V
D	5036,5038,5040,5042		LTL17KTBP5D@V
D	5046,5048		LTL17KRN8D@V
D	7061-7068,7087		1SS355L@V
D	7069-7077		LTL17KYRN5D-P@V

MISCELLANEOUS

S	4000,4006,4007	TACT SWITCH	DSG1079
S	4001-4005,4008	TACTILE SWITCH	DSG1157
S	4009-4011,4017,4018	TACT SWITCH	DSG1079
S	4012-4016	TACTILE SWITCH	DSG1157
S	4019-4021	TACTILE SWITCH	DSG1157
S	5001,5007-5011,5017	TACT SWITCH	DSG1079
S	5002-5006	TACTILE SWITCH	DSG1157
S	5012-5016	TACTILE SWITCH	DSG1157
S	5018,7018	TACT SWITCH	DSG1079
S	5019-5022	TACTILE SWITCH	DSG1157
S	7010-7017	TACTILE SWITCH	DSG1157
CN	4000,5001	FFC/FPC CONNECTOR	DKN1721
CN	4001,5002,7002	27P CONNECTOR	VKN1258
PC	7001,7002	PHOTO INTERRUPTER	GP1S094HCZ0F

Mark	No.	Description	Part No.

RESISTORS

R	4000,4011,4022,4031		RC0603JR-0722KL@V
R	4001,4012,4023,4032		RC0603JR-07820RL@V
R	4002,4013,4024,4033		RC0603JR-0747KL@V
R	4003,4005,4014,4015		RC0603JR-0782RL@V
R	4006,4016,5005,5017		RC0603JR-07330RL@V
R	4007,4017,4049,5008		RC0603JR-071KL@V
R	4025,4026,4034,4035		RC0603JR-0782RL@V
R	4027,4030,4036,4039		RC0603JR-07750RL@V
R	4040,4045,4052		RC0603JR-0722KL@V
R	4041,4046,4053,5002		RC0603JR-07820RL@V
R	4042,4047,4054		RC0603JR-0747KL@V
R	4043,4044,4048,4051		RC0603JR-07750RL@V
R	4055,5048		RC0603JR-07470RL@V
R	4057-4064,4066-4069		RC0603JR-0756RL@V
R	4065,4081,5066,5082		RC0603JR-0722RL@V
R	4070-4072,4074,4075		RC0603JR-0722KL@V
R	4073,5074,7146,7148		RC0603JR-07220RL@V
R	4076-4079,5058-5065		RC0603JR-0756RL@V
R	4082-4084,5001,5012		RC0603JR-0722KL@V
R	4085-4088,5086-5089		RC0603JR-072K2L@V
R	4089-4092,5003,5014		RC0603JR-0747KL@V
R	4095-4097,4100,5081		RC0603JR-074K7L@V
R	4098,4099,5099,5100		RC0603JR-07100RL@V
R	4101-4118,5101-5117		RC0805JR-070RL@V
R	5004,5007,5015,5016		RC0603JR-0782RL@V
R	5013,5022,5031,5040		RC0603JR-07820RL@V
R	5021,5030,5039,5044		RC0603JR-0722KL@V
R	5023,5032,5041,5046		RC0603JR-0747KL@V
R	5024,5025,5033,5034		RC0603JR-0782RL@V
R	5026,5029,5035,5038		RC0603JR-07750RL@V
R	5042,5043,5047,5049		RC0603JR-07750RL@V
R	5045,5052,7116,7119		RC0603JR-07820RL@V
R	5051,5071-5073,5075		RC0603JR-0722KL@V
R	5053,5090-5093,7117		RC0603JR-0747KL@V
R	5054		RC0603JR-071KL@V
R	5056		RC0603JR-072K7L@V
R	5067-5070,5077-5080		RC0603JR-0756RL@V
R	5076,5083-5085,7115		RC0603JR-0722KL@V
R	5096-5098		RC0603JR-074K7L@V
R	7114		RC0603JR-071ML@V
R	7118,7121,7124		RC0603JR-0722KL@V
R	7120,7123,7126,7145		RC0603JR-0747KL@V
R	7122,7125		RC0603JR-07820RL@V
R	7127-7130,7135-7138		RC0603JR-07330RL@V
R	7131-7134,7139-7142		RC0603JR-07510RL@V
R	7143		RC0603JR-07620RL@V
R	7147		RC0603JR-0747KL@V
R	7149-7157		RC0805JR-070RL@V
VR	7018	POTENTIOMETER	DCS1096

CAPACITORS

C	4000-4003,4011-4014		CC0603JRNPO9BN471
C	4004,5009		0603B104K160CT
C	4005-4007,5006-5008		CC0603JRNPO9BN101
C	4010,4016,4019,4022		0603B104K250CT
C	4015,4018,4024,4027		0603X106K100CT
C	4021,4030,5022,5031		KS7106M035A5B07K
C	4023,4032,5024,5033		0603N102J500CT
C	4025,4028,4031,5011		0603B104K250CT
C	4033,4034,5005,5034		0603B471K500CT

Mark	No.	Description	Part No.
	C	4035-4037,5035-5037	0603N331J500CT
	C	5001-5004,5012-5015	CC0603JRNPO9BN471
	C	5016,5019,5025,5028	0603X106K100CT
	C	5017,5020,5023,5026	0603B104K250CT
	C	5029,5032,7070,7072	0603B104K250CT
	C	7068	0603B104K500CT
	C	7069,7074	0603X106K100CT
	C	7071	KS7106M035A5B07K
	C	7073	0603N102J500CT
	C	7075,7080,7081	0603B104K250CT
	C	2020,2213	0402B104K160CT
	C	2203,2210	CC0402KRX7R9BB104
	C	2208	VGV106M016ANB01K
	C	2209	0805X106K100CT
	C	2212	0402B102K500CT

MJTACT ASSY

SEMICONDUCTORS

	D	2701-2705	1SS355L@V

MISCELLANEOUS

	S	2701-2704 TACTILE SWITCH	DSG1155
	CN	2701 13P CONNECTOR	RKN1054
	CN	2702 7P CONNECTOR	VKN1299

JOGA ASSY
Consists of
JLED ASSY
TCH ASSY

OR

JOGA ASSY

SEMICONDUCTORS

	IC	2001-2005	74VHC595FT
NSP	IC	2201	PIC10F206-I/OT
	IC	2202	74VHCT126AFT
	D	2001-2036	FC-1608SXK630D08
	D	2201	DAN217UM
	D	2202	RB520CM-30

MISCELLANEOUS

	L	2001 CHIP SOLID INDUCTOR	XTL3010
	L	2201,2202 SMD FERRITE BEADS	DTF1125
	L	2204 SMD FERRITE BEADS	DTF1125
	L	2205-2208 INDUCTOR	CTF1778
	KN	2201 WRAPPING TERMINAL	CKF1089
	CN	2001,2204 FFC/FPC CONNECTOR	CKS6634
	CN	2201 CONNECTOR	HWW-SL0420-J1@V
	CN	2203 FFC/FPC CONNECTOR	DKN1675
	VA	2201,2202 SMD VARISTOR	EZJZ1V80010

RESISTORS

	R	2001-2036,2207	RC0402JR-07220RL@V
	R	2037,2209,2217	RC0402JR-0710KL@V
	R	2038-2041,2208	RC0402JR-07100RL@V
	R	2201,2202	DCN1187
	R	2206	RC0402DR-0722KL@V
	R	2213,2220	RC0603JR-070RL@V
	R	2214-2216,2230-2233	RC0402JR-07100RL@V
	R	2222-2225	RC0402JR-070RL@V

CAPACITORS

	C	2001,2006-2009,2202	CC0402KRX7R9BB104
	C	2002-2005,2201	0402N221J500CT
	C	2010-2019	0402N102J500CT